

1 Burner Unit

Model Number # 8113-156-001

DESCRIPTION

INVISACOOK – **1 Burner Unit** is a complete, self-contained system. It has 1 induction points to cook thru your porcelain countertop, evenly and sufficiently. While it has a controller, it can also be controlled thru Wi-Fi using your InvisaCook Tuya App.



APPLICATIONS

1 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials—Porcelain

FEATURES

- 1 burning unit elements
- Power Boost option for faster speed.
- Wi-Fi capable with the InvisaCook App so you can control your unit from anywhere.
- Designed for Undermounting installation for any countertop surface in any way possible.


DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGNOBJECT DETECTION

INVISACOOK—1BurnerUnit- Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

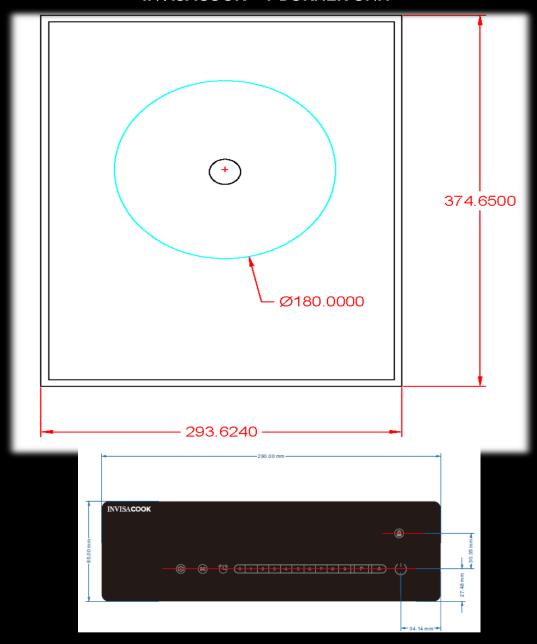

ELECTRICAL ANDMECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	375 x 294 x 55mm
Bottom Size	350 x 285 x 49.5mm
Recommended material	Max thickness is 1.5cm Porcelain

Connection	Description
AC Input	110/120Vac
Wattage	1,200 W
Power Platen Burner Size	1,200w 180mm

TEMPERATURE


Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To 95% relative humidity (non-condensing)

Operating:	to 10,000 feet
Non-operating:	to 50,000 feet



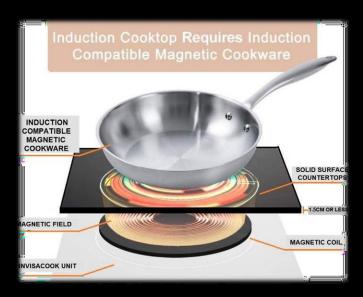

WARRANTY

INVISACOOK – 1 Burner Unit – Individual is covered by a 2-year consumer warranty that provides product replacement only and a 3-year extended warranty to be pruchased. Please visit Invisacook.com/warranty for more information.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY

IEC60950-1 (International)

WIFI STANDARDSCOMPLIANCE https://en.tuya.com/

PRODUCT EMCCOMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits. UL 858:2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019

+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051



LegalNotices


Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications: "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. IMVSACOOKMAKESNOREPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORIMPLIED,WRITTENORORAL,STATUTORYOROTHERWISE,RELATEDTOTHEINFORMATION,INCLUDINGBUTNOTLIMITEDTOTISCONDITION,QUALITY, PERFORMANCEMERO-HANTABILITYORFITIESSFORPURPOSES/rould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall international hold INVISACOOK LLC, and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonableattorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, evenif such claim alleges that INVISACOOK LLC et al, was negligent regarding the design or manufacture of the unit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK LLC intellectual property rights.



Model # 8120-256-001

DESCRIPTION

INVISACOOK – 2 Burner Unit is a complete, self-contained system. It has 2 induction points to cook thru your porcelain countertop, evenly and sufficiently. While it has a controller, it can also be controlled thru Wi-Fi using your InvisaCook Tuya App.

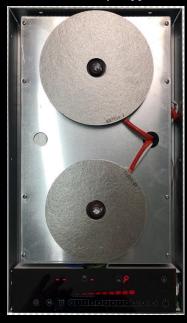

APPLICATIONS

2 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials—Porcelain

FEATURES

- 2 separate burning unit elements
- Power Boost option for faster speed.
- Wi-Fi capable with the InvisaCook App so you can control your unit from anywhere.
- Designed for Undermounting installation for any countertop surface in any way possible.


DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGNOBJECT DETECTION

INVISACOOK – 2 Burner Unit - Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

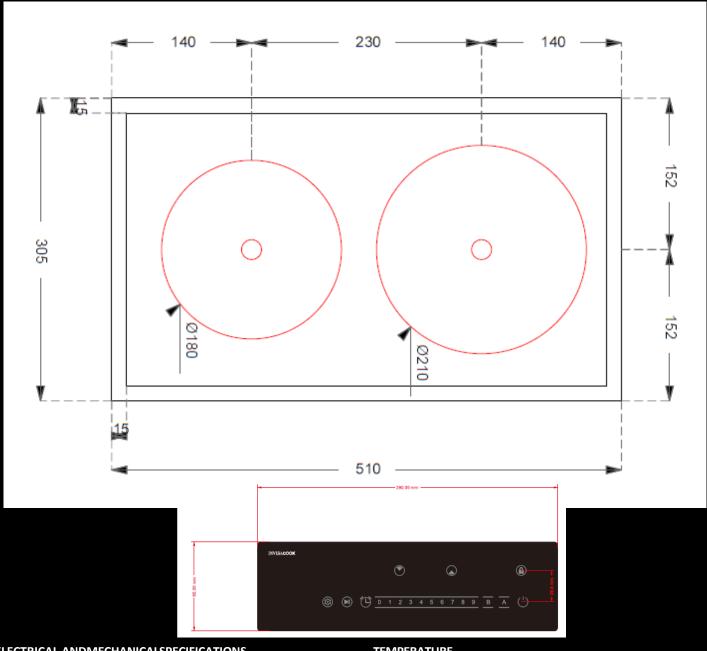

ELECTRICAL ANDMECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	510 x 305 x 50mm
Bottom Size	480 x 275 x 49.5mm
Recommended material	Max thickness is 1.5cm porcelain

Connection	Description
AC Input	110/120 V
Wattage	1,200 W (Total Power Shared)
Power Platen Burner Size	1400w + 1200w (Up+Down) 210mm + 180mm

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To 95% relative humidity (non-condensing)

Operating:	to 10,000 feet
Non-operating:	to 50,000 feet





PRODUCT EMCCOMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

UL 858 :2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019

+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051

WARRANTV

INVISACOOK – 2 Burner Unit – Individual is covered by a two-year consumer warranty that provides product replacement only and a 3-yearlimitedwarranty extension. Please visit Invisacook.com/warranty for more information.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY


IEC60950-1 (International)

WIFI STANDARDSCOMPLIANCE https://en.tuya.com/



LegalNotices

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications." Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. IMVSACOOKMAKESNOREPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORIMPLIED, WRITTENORORAL, STATUTORYOROTHERWISE, RELATED TOTHEIN FORMATION, INCLUDING BUTNOTLIMITED TO ITS CONDITION, QUALITY, PERFORWANCE, WENTARIBLITY OR TITNESSFORPURPOSES sould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall indemnify and hold INVISACOOK LLC, and its officers, employees, subsidiaries, affiliates, and distributors harmless against all caims, costs, damages, and expenses, and reasonableattorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, evenif such claim alleges that INVISACOOK LLC et al, was negligent regarding the design or manufacture of the unit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK LLC intellectual property rights.

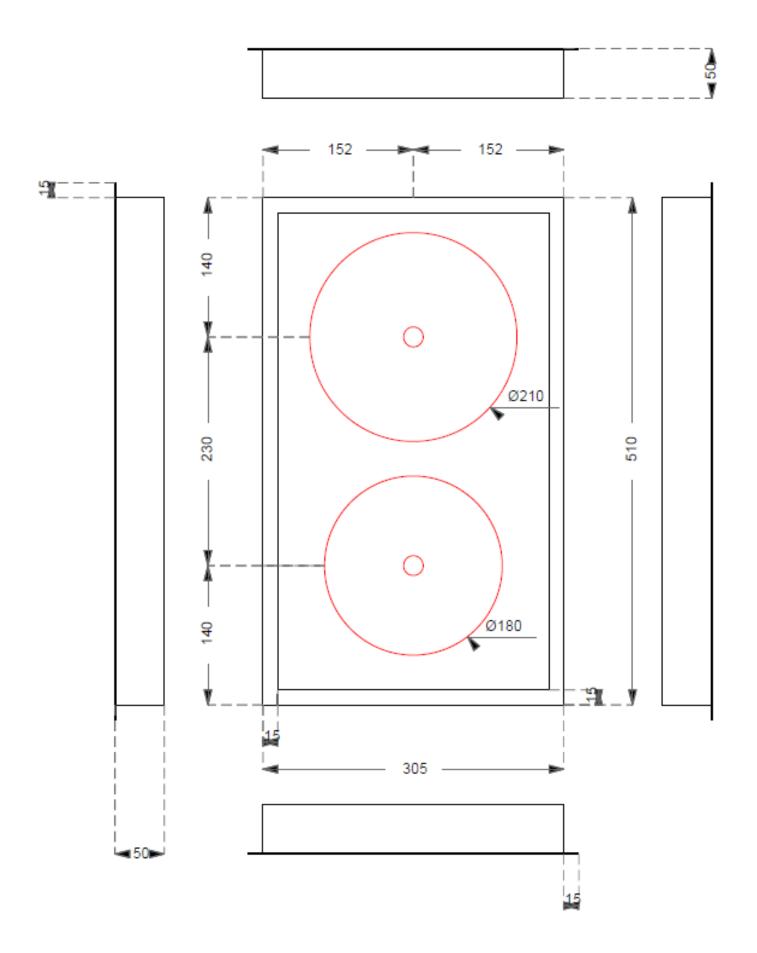



Model # 8121-257-001

DESCRIPTION

INVISACOOK – 2 Burner Unit is a complete, self-contained system. It has 2 induction points to cook thru your porcelain countertop, evenly and sufficiently. While it has a controller that can placed anywhere



APPLICATIONS

2 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- · Cooking Carts
- Materials—Porcelain

FFATURES

- 2 separate burning unit elements
- Power Boost option for faster Water Boiling speed.
- Designed for Undermounting installation for any Porcelain countertop surface in any way possible.


DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGNOBJECT DETECTION

INVISACOOK – 2 Burner Unit - Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

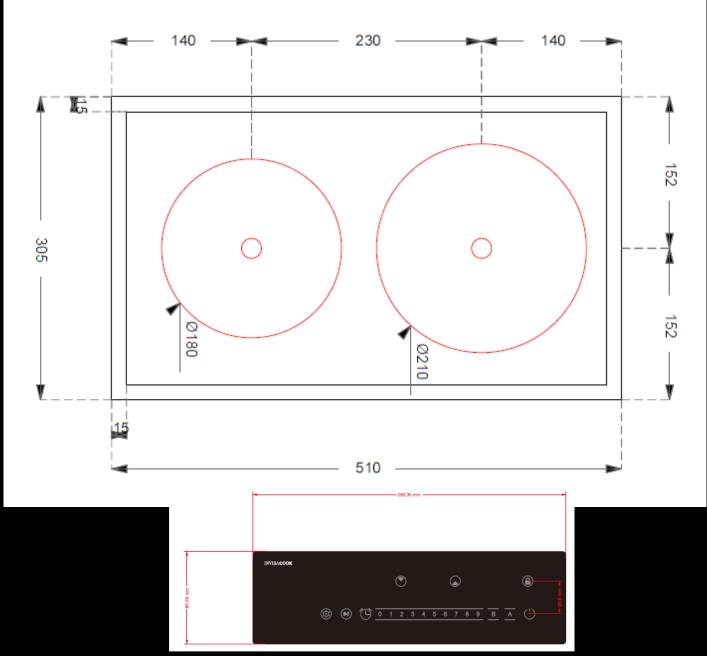

ELECTRICAL ANDMECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	510 x 305 x 50mm
Bottom Size	480 x 275 x 49.5mm
Recommended material	Max thickness is 12mm porcelain

Connection	Description
AC Input	220/240Vac 50/60HZ
Wattage	2,200 W (Total Power Shared) 8.5 AMPs
Power Platen Burner Size	1600w + 1400w (Up+Down) 210mm + 180mm

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To 95% relative humidity (non-condensing)

Operating:	to 3,048 Meters
Non-operating:	to 15,240 Meters





PRODUCT EMCCOMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

UL 858 :2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019

+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051

TUV (EU) No 66/2014 - 2009/125/EC

WARRANTY

INVISACOOK – 2 Burner Unit – Individual is covered by a two-year consumer warranty that provides product replacement only and a five-year limited warranty.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY


IEC60950-1 (International)

Copyright© 2018 - INVISACOOK INC



LegalNotices

Information contained in this publication regarding device applications and the like is provided only foryourconvenienceand may be superseded byupdates. It is your responsibility to ensurethat your application meets with your specifications. "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. INVSACOOKMAKESNOREPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORIMPLIED,WRITTENORORAL,STATUTORYOROTHERWISE,RELATEDTOTHEINFORMATION,INCLUDINGBUTNOTLIMITEDTOTSCONDITION,QUALITY, PERFORWANCEMERCHANITABILITYORITINESSFORPURPOSES/bould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall indemnify and hold INVISACOOK LLC, and its officers, employees, subsidaries, affiliates, and distributors harmless againstall claims, costs, damages, and expenses, and reasonableattorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, evenif such claim alleges that INVISACOOK LLC et al, was negligent regarding the design or manufacture of theunit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK LLC intellectual property rights.

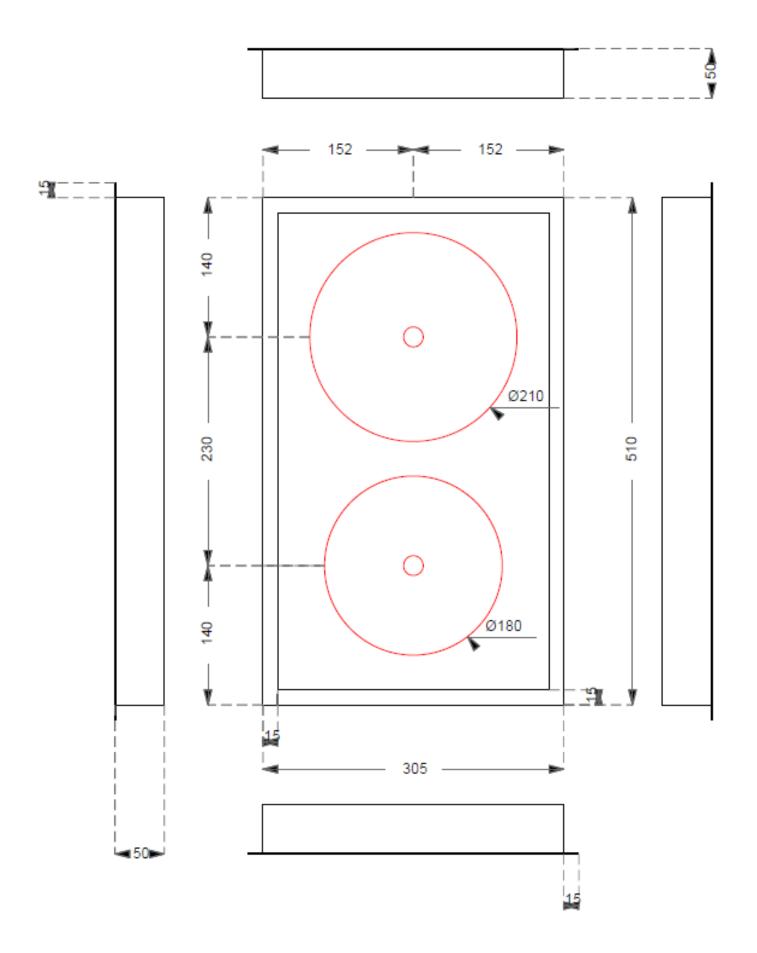



Model Number # 8134-256-001

DESCRIPTION

INVISACOOK – 3 Burner Unit is a complete, self-contained system. It has 3 induction points to cook thru your porcelain countertop, evenly and sufficiently. While it has a controller that can placed anywhere



APPLICATIONS

3 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials Porcelain

FEATURES

- 3 separate burning unit elements
- Power Boost option for faster Water Boiling speed.
- Designed for Undermounting installation for any Porcelain countertop surface in any way possible


DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGN OBJECT DETECTION

INVISACOOK – 3 Burner Unit - Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

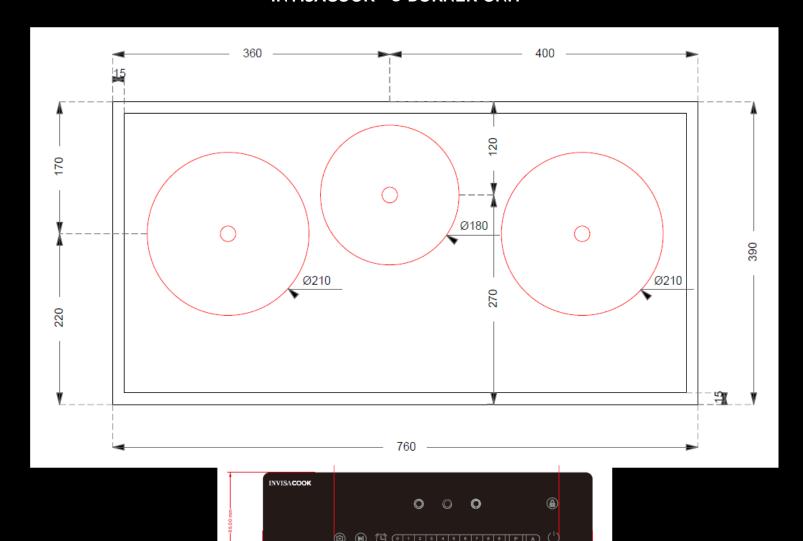

ELECTRICAL AND MECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	760 x 390 x 50mm
Bottom Size	740 x 360 x 49.5mm
Recommended material	Max thickness is 12mm porcelain

Connection	Description
AC Input	220-240Vac 50/60HZ
Wattage	3,600 W (Total Shared) 15 AMPs
Power	1600w + 1400w + 1600w
Platen Burner Size	210mm – 180mm – 210mm

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To95% relative humidity (non-condensing)

Operating:	to 3,048 Meters
Non-operating:	to 15,240 Meters





PRODUCT EMC COMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environmentand market place. System is to have minimum of 3db margin to Class B Limits.

UL 858:2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019

+A2:2019+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051

TUV (EU) No 66/2014 – 2009/125/EC

WARRANTY

INVISACOOK – 3 Burner Unit – Individual is covered by a two-year consumer warranty that provides product replacement only and a five-year limited warranty.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.


PRODUCT SAFETY

IEC60950-1 (International)



Legal Notices

Information contained in this publication regarding device applications and the like is provided only foryour convenienceand may be superseded by updates. It is your responsibility to ensurethat your application meets with your specifications. "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. MMSACOOKMAKESNO REPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORIMPLIEDWRITTENORORAL, STATUTORYOROTHERWSERLATEDTOTHENFORWATIONINGLUDINGBUTNOTLIMITED TOTTSCONDITION, QUALITY, PERFORMANCEMERCHANTABILITYORFTINESSFORPURPOSEShould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyer shall indemnify and hold INVISACOOK La, and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that INVISACOOK Ltc et al, was negligent regarding the design or manufacture of the unit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK Ltc intellectual property rights.

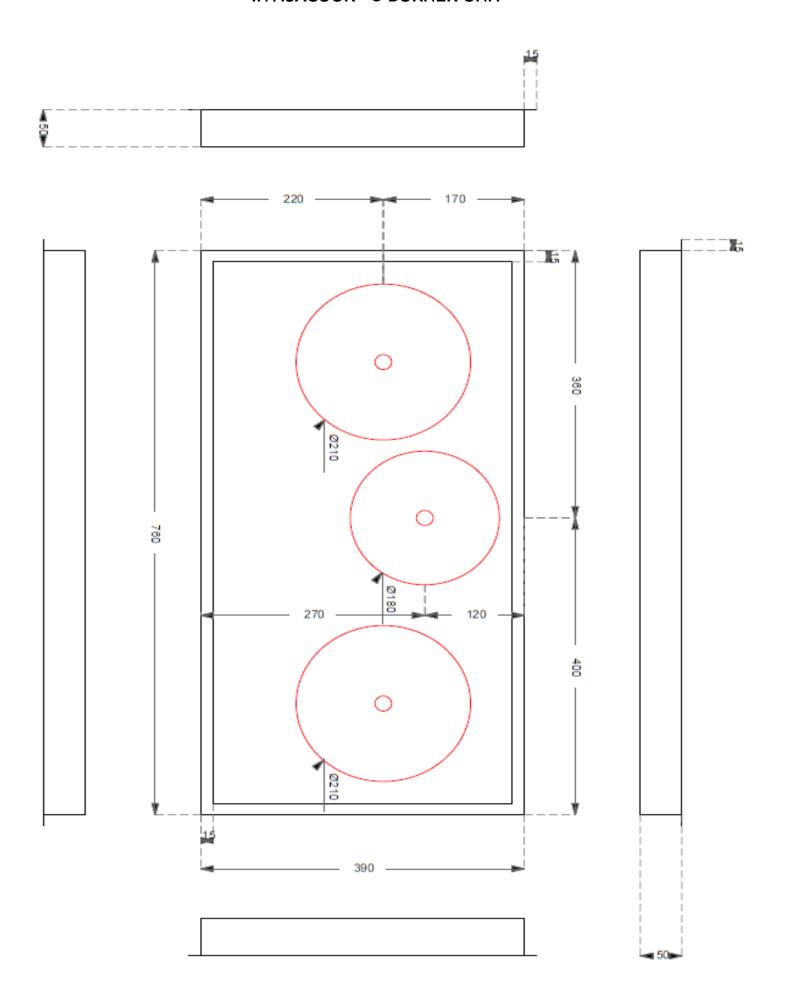



Model # 8140-257-001

DESCRIPTION

INVISACOOK – 4 Burner Unit is a complete, self-contained system. It has 4 induction points to cook thru your Porcelain countertop, evenly and sufficiently. While it has a controller that can placed anywhere.



APPLICATIONS

4 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials—Porcelain

FEATURES

- 4 separate burning unit elements
- Power Boost option for faster Water Boiling speed.
- Designed for Undermounting installation for any Porcelain countertop surface in any way possible

DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGNOBJECT DETECTION

INVISACOOK—4 Burner Unit - Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

INVISACOOK - 4 BURNER UNIT Ø210 Ø210 Ø180 Ø180 INVISACOOK

ELECTRICAL ANDMECHANICALSPECIFICATIONS

Dimension	Description
Dimension	580 x 510 x 50mm
Bottom Size	550 x 480 x 49.5mm
Recommended material	Max thickness is 12mm Porcelain.

Connection	Description
AC Input	220/240Vac 50/60HZ
Wattage	4,000 W (Total Shared) Max at Breaker
Power Platen Burner Size	1600w + 1400w + 1600w + 1400w 210mm - 180mm - 210mm - 180mm

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To 95% relative humidity (non-condensing)

Operating:	to 3,048 Meters
Non-operating:	to 15,240 Meters





WARRANTY

INVISACOOK – 4 Burner Unit – Individual is covered by a two-year consumer warranty that provides product replacement only and a five-year limited warranty.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY

IEC60950-1 (International)

PRODUCT EMCCOMPLIANCE – CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

UL 858:2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019

+A2:2019

+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025


G-MARK GLVD0016-0051

TUV (EU) No 66/2014 – 2009/125/EC



LegalNotices

Information contained in this publication regarding device applications and the like is provided only foryourconvenienceand may be superseded byupdates. It is your responsibility to ensure that your application meets with your specifications. "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. INVSACOOKMAKESNOREPRESENTATIONSOR WARRANTIESDFANYKINDWHETHEREVPRESSORIMPLIED.WRITTENORORAL.STATUTORYOROTHERWSE.RELATEDTOTHEINFORMATION,NOLUDINGBUTNOTLMITEDTOTISCONDITION.VOLUDITY, PERFORWANCEMERCHANTABILITYORFITNESSFORPURPOSEShould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall indemnify and hold INVISACOOK LLC, and its officers, employees, subsidiaries, affiliates, and distributors harmless againstall claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, anyclaim of personal injury or death associated with such unintended or unauthorized use, event such claim alleges that INVISACOOK LLC et al, was negligent regarding the design or manufacture of theunit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK LLC intellectual property rights.

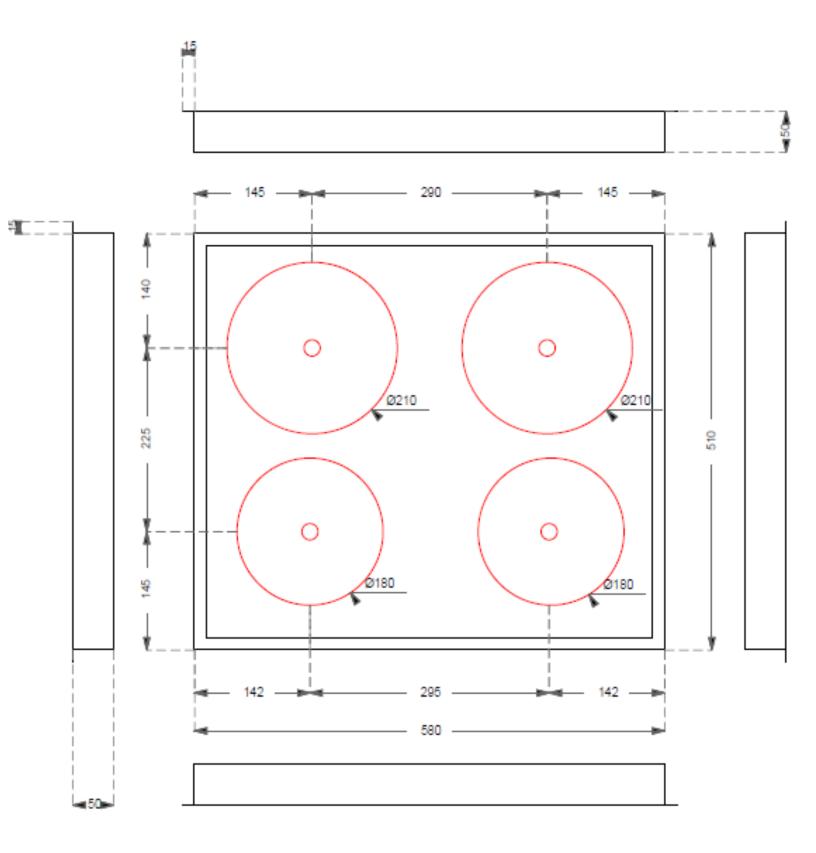




Model Number # 8150-256-001

DESCRIPTION

INVISACOOK – 5 Burner Unit is a complete, self-contained system. It has 5 induction points to cook thru your Porcelain countertop, evenly and sufficiently. While it has a controller that can be installed anywhere.

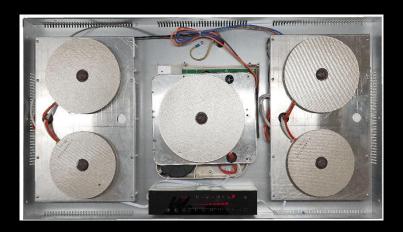

APPLICATIONS

5 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- Outdoor Kitchens
- Entertaining Islands or Tables
- · Cooking Carts
- Materials Porcelain

FEATURES

- 5 separate burning unit elements
- Power Boost option for faster Water Boiling speed.
- Designed for Undermounting installation for any Porcelain countertop surface in any way possible


DEVICE OPERATION


When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number (H-8)

FOREIGN OBJECT DETECTION

INVISACOOK -5 Burner Unit - Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

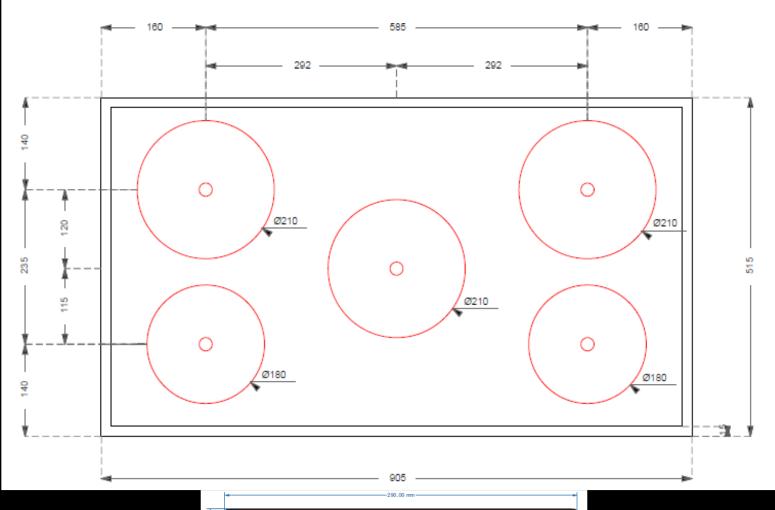

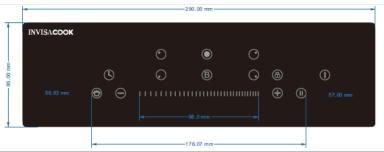

ELECTRICAL AND MECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	905 x 515 x 50mm
Bottom Size	875 x 485 x 49.5mm
Recommended material	Max thickness is 12mm Porcelian

Connection	Description
AC Input	220-240Vac 50/60HZ
Wattage	5,600 W (Total Power Shared) 23.3 AMPs
Max Power Per Burner	1600w + 1400w + 1600w + 1400w + 1600w
Platen Burner Size	210mm - 180mm - 210mm - 180mm - 210mm
Platen Burner Size	210mm - 180mm - 210mm - 180mm - 210mm

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To 85% relative humidity (non-condensing
Non-Operating:	To 95% relative humidity (non-condensing)

Operating:	to 3,048 Meters
Non-operating:	to 15,240 Meters





NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

PRODUCT EMC COMPLIANCE - CLASS B COMPLIANCE

UL 858:2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019

+A2:2019+A14:2019

EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051

TUV (EU) No 66/2014 - 2009/125/EC

WARRANTY

INVISACOOK - 5 Burner Unit - Individual is covered by a two-year consumer warranty that provides product replacement only and a five-year limited warranty.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY

IEC60950-1 (International)



Legal Notices

Information contained in this publication regarding device applications and the like is provided only foryour convenienceand may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. INMSACOCKMAKESNO REPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORIMPUED,WRITTENORORAL,STATUTORYOROTHERWISE,RELATEDTOTHENFORMATION,INCLUDINGBUTNOTLIMITED TO ITS CONDITION, QUALITY, PERFORMANCE,MERCHANTABILITYORFITNESSFORPURPOSES hould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyer shall indemnify and hold INVISACOOK LLC, and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that INVISACOOK INC et al, was negligent regarding the design or manufacture of the unit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK INC intellectual

