4" X 12" CREAM TAUPE (H) Marble



PART NUMBER PROFILE MB1716-0412H0 TILES

AVAILABILITY VARIATION
IN STOCK MEDIUM

DIMENSIONS GROUT JOINT

 $4'' \times 12'' = .333 \text{ sqft (+/-)}$ 1/8"

THICKNESS SEALER
3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

12" X 24" CREAM TAUPE (H) Marble, Stone



PART NUMBER PROFILE MB1716-1224H0 TILES

AVAILABILITY VARIATION IN STOCK MEDIUM

DIMENSIONS GROUT JOINT

 $12'' \times 24'' = 2 \text{ sqft (+/-)}$ 1/8"

THICKNESS SEALER
3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

12" X 24" CREAM TAUPE (P) Marble, Stone



PART NUMBER PROFILE MB1716-1224PO TILES

AVAILABILITY VARIATION IN STOCK MEDIUM

DIMENSIONS GROUT JOINT

 $12'' \times 24'' = 2 \text{ sqft (+/-)}$ 1/8"

THICKNESS SEALER
3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

1" X 4" HERRINGBONE CREAM TAUPE (H) Stone, Marble



PART NUMBER PROFILE MB1716-HB14H0 MOSAICS

AVAILABILITY GROUT JOINT

IN STOCK 1/8"

DIMENSIONS SEALER $9'' \times 11.5'' = .72 \text{ sqft}$ YES

THICKNESS 3/8"

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

STAGGER CREAM TAUPE (H&P) Stone, Marble



PART NUMBER	PROFILE
MB1716-STGR00	MOSAICS
AVAILABILITY IN STOCK	variation medium
DIMENSIONS	GROUT JOINT
11.63" x 12.5" = 1.01 sqft	1/16"

SEALER

YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

THICKNESS 3/8"

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	Standard Commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

VISION CREAM TAUPE (P) Marble, Stone



PART NUMBER	PROFILE
MB1716-VISNPO	MOSAICS
AVAILABILITY IN STOCK	VARIATION MEDIUM
DIMENSIONS	GROUT JOINT
12" x 12.38" = 1.03 sqft	1/8"
THICKNESS	SEALER

YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

3/8"

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	Standard Commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ALLURE CAPTIVATE CREAM TAUPE (H) W/ COCOA TAUPE (P)

Stone, Marble / Captivate Cream Taupe H Cocoa Taupe P Micro Chips



PART NUMBER

MB1716-CAPTH0

AVAILABILITY
IN STOCK

DIMENSIONS 10.5" x 11.43" = .83 sqft

THICKNESS 3/8"

PROFILE

MOSAICS

GROUT JOINT 1/16"

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Yes	No	No
	IICAL DATA						

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ALLURE CHARISMA CREAM TAUPE (H) W/ COCOA TAUPE (P)

Stone, Marble / with Cocoa Taupe (P) Microchips



PART NUMBER	PROFILE
MB1716-CHARHO	MOSAICS
AVAILABILITY IN STOCK	VARIATION LOW
DIMENSIONS	GROUT JOINT
8.32" x 10.82" = .62 sqft	1/16"
THICKNESS 3/8"	SEALER YES

ENVIRONMENTS

ENVIR	ONMENTS						
WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Yes	No	No
TECHN	NICAL DATA						
FEATURES		SI	PECIFICATION			STANDAR	lD
DCOF						ANSI A 1 37	7.1

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ALLURE ENCHANT CREAM TAUPE (H) W/ COCOA TAUPE (P)

Stone, Marble / with Cocoa Taupe (P) Microchips



PART NUMBER	PROFILE
MB1716-ENCHHO	MOSAICS
AVAILABILITY IN STOCK	variation low
DIMENSIONS	GROUT JOINT
11.44" x 11.88" = .94 sqft	1/16"
THICKNESS 3/8"	SEALER YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ALLURE RADIANCE CREAM TAUPE (H) W/ COCOA TAUPE (P) Stone, Marble



PART NUMBER

MB1716-RADIHO

PROFILE MOSAIC

AVAILABILITY

IN STOCK

DIMENSIONS

9.75" x 12.87" = .87 sqft

THICKNESS

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	Not recommended	Recommended for wet area walls only, if sealed properly	No	

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	Standard Commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ORIGAMI BUROKKU CREAM TAUPE (P) Stone, Marble



PART NUMBER PROFILE

MB1716-BURO00 MOSAICS

AVAILABILITY VARIATION

IN STOCK MEDIUM

DIMENSIONS GROUT JOINT $8.12'' \times 7.10'' = .297 \text{ sqft}$ 1/16''

THICKNESS SEALER 3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ORIGAMI HOSHI CREAM TAUPE (P) Stone, Marble



PART NUMBER PROFILE MB1716-HOSH00 MOSAICS

AVAILABILITY VARIATION IN STOCK MEDIUM

DIMENSIONS GROUT JOINT

 $10.15'' \times 11.75'' = .828 \text{ sqft}$ 1/16"

THICKNESS SEALER 3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

ORIGAMI MASSUGU CREAM TAUPE (P) W/ COCOA TAUPE (P)

Stone, Marble / Cream Taupe (P) with Cocoa Taupe (P)



PART NUMBER PROFILE
MB1716-MASS00 MOSAICS

AVAILABILITY VARIATION
IN STOCK MEDIUM

DIMENSIONS GROUT JOINT

1 box = 2.2 sqft 1/16"

THICKNESS SEALER
3/8" YES

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	Yes	Yes	No	No	Recommended for wet area walls only, if sealed properly	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1
TRAFFIC	standard commercial	NA

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

12" PURE LINER CREAM TAUPE (H) Stone, Marble




ENVIRONMENTS

, ,	0. (
WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
No	No	No	No	No	Recommended for well area walls only, if seeded properly	No	No
TECHN	NICAL DATA						
FEATURE	S	SI	PECIFICATION			STANDAR	RD
DCOF						ANSI A132	7.1

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.

12" PURE LINER CREAM TAUPE (P) Stone, Marble

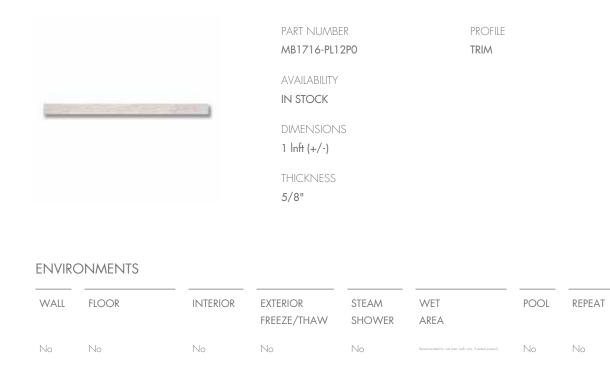

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
DCOF		ANSI A137.1

DUE TO THE INHERENT CHARACTERISTICS OF NATURAL STONE, THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT. CREAM TAUPE MAY BE USED IN WET AREAS (WALLS ONLY) WHEN SEALED CORRECTLY. TWO COATS OF PENETRATING SEALER ARE RECOMMENDED.