

## RENAISSANCE 12" X 24" BELLA CANDIDO (M) *Porcelain*



PART NUMBER  
PO2323-1224M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.937 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER AREA	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 5	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	DCOF - ANSI A.137.1	> 0,42 wet
Frost Resistance - ISO 10545-12	Resistant	Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>
Regularity of Length & Width - ISO 10545-2	± 0,15%	Regularity of Rectangularity - ISO 10545-2	± 0,2%
Regularity of Straightness of Sides - ISO 10545-2	± 0,1%	Regularity of Thickness - ISO 10545-2	± 5%
Surface Quality - ISO 10545-2	Compliant	Resistance To Staining - ISO 10545-14	Cl. 5
Resistance to Swimming Pool Salts - ISO 10545-13	GA	Surface Flatness - ISO 10545-2	± 0,35%
Thermal Shock Resistance - ISO 10545-9	Resistant	Water Absorption - ISO 10545-3	Average Value 0,08%

## RENAISSANCE 12" X 24" BELLA CANDIDO (P) *Porcelain*



PART NUMBER  
PO2323-1224PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.937 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 5	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	Frost Resistance - ISO 10545-12	Resistant
Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>	Regularity of Length & Width - ISO 10545-2	± 0,15%
Regularity of Rectangularity - ISO 10545-2	± 0,2%	Regularity of Straightness of Sides - ISO 10545-2	± 0,1%
Regularity of Thickness - ISO 10545-2	± 5%	Surface Quality - ISO 10545-2	Compliant
Resistance To Staining - ISO 10545-14	Cl. 4	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Surface Flatness - ISO 10545-2	± 0,35%	Thermal Shock Resistance - ISO 10545-9	Resistant
Water Absorption - ISO 10545-3	Average Value 0,08%		

## RENAISSANCE 24" X 24" BELLA CANDIDO (M) *Porcelain*



PART NUMBER  
PO2323-2424M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.875 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 5	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	DCOF - ANSI A.137.1	> 0,42 wet
Frost Resistance - ISO 10545-12	Resistant	Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>
Regularity of Length & Width - ISO 10545-2	± 0,15%	Regularity of Rectangularity - ISO 10545-2	± 0,2%
Regularity of Straightness of Sides - ISO 10545-2	± 0,1%	Regularity of Thickness - ISO 10545-2	± 5%
Surface Quality - ISO 10545-2	Compliant	Resistance To Staining - ISO 10545-14	Cl. 5
Resistance to Swimming Pool Salts - ISO 10545-13	GA	Surface Flatness - ISO 10545-2	± 0,35%
Thermal Shock Resistance - ISO 10545-9	Resistant	Water Absorption - ISO 10545-3	Average Value 0,08%

## RENAISSANCE 24" X 24" BELLA CANDIDO (P) *Porcelain*



PART NUMBER  
PO2323-2424PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.875 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	FREEZE/THAW Yes	SHOWER Wall Only	AREA Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 5	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	Frost Resistance - ISO 10545-12	Resistant
Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>	Regularity of Length & Width - ISO 10545-2	± 0,15%
Regularity of Rectangularity - ISO 10545-2	± 0,2%	Regularity of Straightness of Sides - ISO 10545-2	± 0,1%
Regularity of Thickness - ISO 10545-2	± 5%	Surface Quality - ISO 10545-2	Compliant
Resistance To Staining - ISO 10545-14	Cl. 4	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Surface Flatness - ISO 10545-2	± 0,35%	Thermal Shock Resistance - ISO 10545-9	Resistant
Water Absorption - ISO 10545-3	Average Value 0,08%		

## RENAISSANCE 12" X 24" CALACATTA GOLD (M) *Porcelain*



PART NUMBER  
PO2314-1224M1

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/K-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 12" X 24" CALACATTA GOLD (P) *Porcelain*



PART NUMBER  
PO2314-1224P1

GROUT JOINT  
1/16"

NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE  
TILE

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

AVAILABILITY  
IN STOCK

THICKNESS  
9mm

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	≤ 7 10-6/°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	≤ 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 24" X 24" CALACATTA GOLD (M) *Porcelain*



PART NUMBER  
PO2314-2424M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.875 sqft

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Residential Use Only	Floor Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH		FIREPLACE SURROUND				
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	≥ 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 24" X 24" CALACATTA GOLD (P) *Porcelain*



PART NUMBER  
PO2314-2424PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.87 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes	WALL ONLY	WALL ONLY	Yes
BACKSPLASH		FIREPLACE SURROUND				
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	≤ 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	≤ 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		



## RENAISSANCE 2" X 2" CALACATTA GOLD (M) *Porcelain*



PART NUMBER <b>PO2314-M002M0</b>	PROFILE <b>MOSAIC</b>	AVAILABILITY <b>IN STOCK</b>
GROUT JOINT <b>1/16"</b>	DIMENSIONS <b>11.81" x 11.81" = .97 sqft</b>	THICKNESS <b>3/8"</b>
NOTES Available nationwide.  Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.		

### APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER AREA	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1 mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 2" X 2" CALACATTA GOLD (P) *Porcelain*

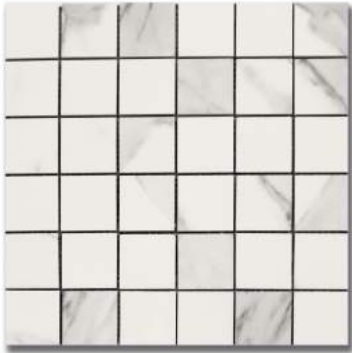

PART NUMBER  
PO2314-M002P0

PROFILE  
MOSAIC

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 11.81" = .97 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 12" X 24" CHARMING (M) *Porcelain*



PART NUMBER  
**PO2315-1224M0**

PROFILE  
**TILE**

AVAILABILITY  
**IN STOCK**

GROUT JOINT  
**1/16"**

DIMENSIONS  
**11.81" x 23.62" = 1.94 sqft**

THICKNESS  
**3/8"**

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Wall Only	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR	MR	MR	MR	
Recycled Content	Regional Materials	Sustainability Report	Environmental Product Declaration	
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	
MR	EQ	SS	EA	ID
Material Ingredients	Low Emitting Materials	Heat Island Effect	Energy Performance	Innovation & Design
Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29	1,0 - 1,3 W/mK	Certificate Greenguard

## RENAISSANCE 12" X 24" CHARMING (P) *Porcelain*



PART NUMBER  
PO2315-1224PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	FREEZE/THAW Yes	SHOWER Wall Only	AREA Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	≤ 7 10 <sup>-6</sup> °C <sup>-1</sup>	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	≤ 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR	MR	MR	MR
Recycled Content	Regional Materials	Sustainability Report	Environmental Product Declaration
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO 14025

MR	EQ	SS	EA	ID
Material Ingredients	Low Emitting Materials	Heat Island Effect	Energy Performance	Innovation & Design

akdo.com Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard No VOCs Emission Light Color SRI > 29 1,9 W/m<sup>2</sup> 3 W/m<sup>2</sup> COMMERCIAL HOSPITALITY RESIDENTIAL Certificate GreenGuard

## RENAISSANCE 24" X 24" CHARMING (P) *Porcelain*



PART NUMBER  
**PO2315-2424PO**

PROFILE  
**TILE**

AVAILABILITY  
**IN STOCK**

GROUT JOINT  
**1/16"**

DIMENSIONS  
**23.64" x 23.64" = 3.87 sqft**

THICKNESS  
**3/8"**

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH	FIREPLACE					
Yes	Yes SURROUND					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR	MR	MR	MR
Recycled Content	Regional Materials	Sustainability Report	Environmental Product Declaration
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO 14025

MR	EQ	SS	EA	ID
Material Ingredients	Low Emitting Materials	Heat Island Effect	Energy Performance	Innovation & Design

akdo.com Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard No VOCs Emission Light Color SRI > 29 1,0 1,3 W/mk COMMERCIAL HOSPITALITY RESIDENTIAL Certificate GreenGuard

## RENAISSANCE 12" X 24" IMPERO (M) *Porcelain*



PART NUMBER  
**PO2316-1224M1**

PROFILE  
**TILE**

AVAILABILITY  
**IN STOCK**

GROUT JOINT  
**1/16"**

DIMENSIONS  
**11.81" x 23.62" = 1.94 sqft**

THICKNESS  
**9mm**

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1 mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

#### EQ112

#### Low-Emitting Materials

Zero V.O.C.  
Emissions

## RENAISSANCE 12" X 24" IMPERO (P) *Porcelain*



PART NUMBER  
PO2316-1224P1

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
9mm

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH		FIREPLACE SURROUND				
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

EQ112  
Low-Emitting Materials

Zero V.O.C.  
Emissions

## RENAISSANCE 24" X 24" IMPERO (P) *Porcelain*



PART NUMBER  
PO2316-2424PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.87 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH
Yes	Residential Use Only	Floor Residential	Yes	Yes	Wall Only	Yes	Yes
FIREPLACE SURROUND							
Yes							

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

EQ112  
Low-Emitting Materials

Zero Emissions V.O.C.



## RENAISSANCE 2" X 2" IMPERO (M) *Porcelain*



PART NUMBER  
PO2316-M002M0

PROFILE  
MOSAIC

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 11.81" = .97 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER AREA	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1 mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

#### EQ112

#### Low-Emitting Materials

Zero V.O.C.  
Emissions

## RENAISSANCE 12" X 24" MARQUINA (M) *Porcelain*



PART NUMBER  
PO2317-1224M1

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
9mm

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Wall Only	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

<b>EQ112</b> Low-Emitting Materials	<b>MR</b> Recycled Content	<b>MR</b> Regional Materials	<b>MR</b> Sustainability Report
Zero Emissions	V.O.C. 13,7%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report
<b>MR</b> Environmental Product Declaration	<b>MR</b> Material Ingredients	<b>EQ</b> Low Emitting Materials	<b>SS</b> Heat Island Effect
Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29
<b>EA</b> Energy Performance	<b>ID</b> Innovation & Design		
1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	Certificate Greenguard		

## RENAISSANCE 12" X 24" MARQUINA (P) *Porcelain*



PART NUMBER  
PO2317-1224P1

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
9mm

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	FREEZE/THAW Yes	SHOWER Wall Only	AREA Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

EQ112	MR	MR	MR
Low-Emitting Materials	Recycled Content	Regional Materials	Sustainability Report
Zero Emissions	V.O.C. 13,7%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report
MR	MR	EQ	SS
Environmental Product Declaration	Material Ingredients	Low Emitting Materials	Heat Island Effect
Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29

## RENAISSANCE 24" X 24" MARQUINA (M) *Porcelain*



PART NUMBER  
PO2317-2424M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64"x23.64" = 3.87 sqft

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Wall Only	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	≤ 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	≤ 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

## RENAISSANCE 24" X 24" MARQUINA (P) *Porcelain*



PART NUMBER  
PO2317-2424PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.87 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH		FIREPLACE SURROUND				
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.


### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

EQ112	MR	MR	MR
Low-Emitting Materials	Recycled Content	Regional Materials	Sustainability Report
Zero Emissions	V.O.C. 13,7%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report
MR	MR	EQ	SS
Environmental Product Declaration	Material Ingredients	Low Emitting Materials	Heat Island Effect
Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29

## RENAISSANCE 2" X 2" MARQUINA (M) *Porcelain*

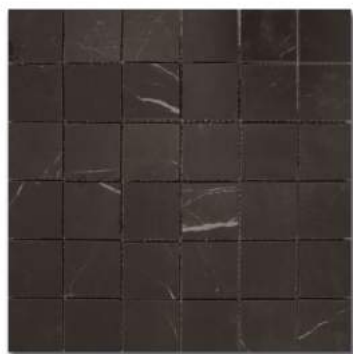

PART NUMBER <b>PO2317-M002M0</b>	PROFILE <b>MOSAIC</b>	AVAILABILITY <b>IN STOCK</b>
GROUT JOINT <b>1/16"</b>	DIMENSIONS <b>11.81" x 11.81" = .97 sqft</b>	THICKNESS <b>3/8"</b>

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6/C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR Recycled Content	MR Regional Materials	MR Sustainability Report	MR Environmental Product Declaration	
13,7%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	
MR Material Ingredients	EQ Low Emitting Materials	SS Heat Island Effect	EA Energy Performance	ID Innovation & Design
Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29	1,0 - 1,3 W/mK	Certificate Greenguard

## RENAISSANCE 2" X 2" MARQUINA (P) *Porcelain*



PART NUMBER <b>PO2317-M002P0</b>	PROFILE <b>MOSAIC</b>	AVAILABILITY <b>IN STOCK</b>
GROUT JOINT <b>1/16"</b>	DIMENSIONS <b>11.81" x 11.81" = .97 sqft</b>	THICKNESS <b>3/8"</b>

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Residential Use Only	Floor Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR Recycled Content 13,7%	MR Regional Materials 32%	MR Sustainability Report Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	MR Environmental Product Declaration Available industry-wide Environmental Product Declaration (EPD) conform to ISO 14025
---------------------------------	---------------------------------	---	---

MR Material Ingredients	EQ Low Emitting Materials	SS Heat Island Effect	EA Energy Performance	ID Innovation & Design
----------------------------	------------------------------	--------------------------	--------------------------	---------------------------

akdo.com Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard

No VOCs Emission

Light Color SRI > 29

COMMERCIAL HOSPITALITY RESIDENTIAL

1,000 ft<sup>2</sup>, 3 W/m<sup>2</sup> Certificate GreenGuard

## RENAISSANCE 12" X 24" NEBBIA BIANCA (M) *Porcelain*



PART NUMBER  
PO2322-1224M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.937 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 4	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	DCOF - ANSI A.137.1	> 0,42 wet
Frost Resistance - ISO 10545-12	Resistant	Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>
Regularity of Length & Width - ISO 10545-2	± 0,15%	Regularity of Rectangularity - ISO 10545-2	± 0,2%
Regularity of Straightness of Sides - ISO 10545-2	± 0,1%	Regularity of Thickness - ISO 10545-2	± 5%
Surface Quality - ISO 10545-2	Compliant	Resistance To Staining - ISO 10545-14	Cl. 5
Resistance to Swimming Pool Salts - ISO 10545-13	GA	Surface Flatness - ISO 10545-2	± 0,35%
Thermal Shock Resistance - ISO 10545-9	Resistant	Water Absorption - ISO 10545-3	Average Value 0,08%



## RENAISSANCE 12" X 24" NEBBIA BIANCA (P) *Porcelain*



PART NUMBER  
PO2322-1224PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.937 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 4	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	Frost Resistance - ISO 10545-12	Resistant
Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>	Regularity of Length & Width - ISO 10545-2	± 0,15%
Regularity of Rectangularity - ISO 10545-2	± 0,2%	Regularity of Straightness of Sides - ISO 10545-2	± 0,1%
Regularity of Thickness - ISO 10545-2	± 5%	Surface Quality - ISO 10545-2	Compliant
Resistance To Staining - ISO 10545-14	Cl. 4	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Surface Flatness - ISO 10545-2	± 0,35%	Thermal Shock Resistance - ISO 10545-9	Resistant
Water Absorption - ISO 10545-3	Average Value 0,08%		

## RENAISSANCE 24" X 24" NEBBIA BIANCA (M) *Porcelain*



PART NUMBER  
PO2322-2424M0

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.875 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 4	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	DCOF - ANSI A.137.1	> 0,42 wet
Frost Resistance - ISO 10545-12	Resistant	Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>
Regularity of Length & Width - ISO 10545-2	± 0,15%	Regularity of Rectangularity - ISO 10545-2	± 0,2%
Regularity of Straightness of Sides - ISO 10545-2	± 0,1%	Regularity of Thickness - ISO 10545-2	± 5%
Surface Quality - ISO 10545-2	Compliant	Resistance To Staining - ISO 10545-14	Cl. 5
Resistance to Swimming Pool Salts - ISO 10545-13	GA	Surface Flatness - ISO 10545-2	± 0,35%
Thermal Shock Resistance - ISO 10545-9	Resistant	Water Absorption - ISO 10545-3	Average Value 0,08%

## RENAISSANCE 24" X 24" NEBBIA BIANCA (P) *Porcelain*



PART NUMBER  
PO2322-2424PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
23.64" x 23.64" = 3.875 sqft

THICKNESS  
10mm

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes FREEZE/THAW	Wall Only SHOWER	Wall Only AREA	Yes
BACKSPLASH	FIREPLACE					
Yes	SURROUND					
	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-7	Cl. 4	Breaking Strength - ISO 10545-4	Average Value 3200 N
Crazing Resistance - ISO 10545-11	Resistant	Frost Resistance - ISO 10545-12	Resistant
Bending Resistance - ISO 10545-4	Average Value 50 N/mm <sup>2</sup>	Regularity of Length & Width - ISO 10545-2	± 0,15%
Regularity of Rectangularity - ISO 10545-2	± 0,2%	Regularity of Straightness of Sides - ISO 10545-2	± 0,1%
Regularity of Thickness - ISO 10545-2	± 5%	Surface Quality - ISO 10545-2	Compliant
Resistance To Staining - ISO 10545-14	Cl. 4	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Surface Flatness - ISO 10545-2	± 0,35%	Thermal Shock Resistance - ISO 10545-9	Resistant
Water Absorption - ISO 10545-3	Average Value 0,08%		

## RENAISSANCE 12" X 24" PEARL (M) *Porcelain*



PART NUMBER  
**PO2318-1224M0**

PROFILE  
**TILE**

AVAILABILITY  
**IN STOCK**

GROUT JOINT  
**1/16"**

DIMENSIONS  
**11.81" x 23.62" = 1.94 sqft**

THICKNESS  
**3/8"**

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Wall Only	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1 mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR Recycled Content	MR Regional Materials	MR Sustainability Report	MR Environmental Product Declaration	
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO14025	
MR Material Ingredients	EQ Low Emitting Materials	SS Heat Island Effect	EA Energy Performance	ID Innovation & Design
Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard	No VOCs Emission	Light Color SRI > 29	1,0 - 1,3 W/mK	Certificate Greenguard

## RENAISSANCE 12" X 24" PEARL (P) *Porcelain*



PART NUMBER  
PO2318-1224PO

PROFILE  
TILE

AVAILABILITY  
IN STOCK

GROUT JOINT  
1/16"

DIMENSIONS  
11.81" x 23.62" = 1.94 sqft

THICKNESS  
3/8"

### NOTES

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM	WET	POOL
Yes	Residential Use Only	Floor Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1 mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR	MR	MR	MR
Recycled Content	Regional Materials	Sustainability Report	Environmental Product Declaration
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO 14025

MR	EQ	SS	EA	ID
Material Ingredients	Low Emitting Materials	Heat Island Effect	Energy Performance	Innovation & Design

akdo.com Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard No VOCs Emission Light Color SRI > 29 1,9 W/mk 3 W/mk COMMERCIAL HOSPITALITY RESIDENTIAL Certificate GreenGuard

## RENAISSANCE 24" X 24" PEARL (P) *Porcelain*



PART NUMBER <b>PO2318-2424PO</b>	PROFILE <b>TILE</b>	AVAILABILITY <b>IN STOCK</b>
GROUT JOINT <b>1/16"</b>	DIMENSIONS <b>23.64" x 23.64" = 3.87 sqft</b>	THICKNESS <b>3/8"</b>

### NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Residential Use Only	Floor Residential	Yes	Wall Only	Wall Only	Yes
BACKSPLASH	FIREPLACE SURROUND					
Yes	Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Breaking Strength - ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	± 7 10-6°C-1	DCOF - ANSI A.137.1	> 0.42 Wet
Frost Resistance - ISO 10545-12	Compliant	Coefficient of Restitution - ISO-10545-5	Compliant
Bending Resistance - ISO 10545-4	Compliant	Moisture Expansion - ISO 10545-10	± 0.01% (0.1mm/m)
Reaction to Fire - EN 13501-1	A1fl	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Resistance to Household Chemicals - ISO 10545-13	A	Resistance to Swimming Pool Salts - ISO 10545-13	A
Booted Ramp Test - DIN 51130	R10	Surface Flatness - ISO 10545-2	Compliant
Water Absorption - ISO 10545-3	0.2%		

### LEED

MR Recycled Content	MR Regional Materials	MR Sustainability Report	MR Environmental Product Declaration
13,8%	32%	Available self-declared Corporate Sustainability Report (CSR) conform to Global Reporting Initiative (GRI) Sustainability Report	Available industry-wide Environmental Product Declaration (EPD) conform to ISO 14025

MR Material Ingredients	EQ Low Emitting Materials	SS Heat Island Effect	EA Energy Performance	ID Innovation & Design
----------------------------	------------------------------	--------------------------	--------------------------	---------------------------

akdo.com Available Health Product Declaration (HPD) in compliance with the Health Product Declaration Open Standard

No VOCs Emission

Light Color SRI > 29

COMMERCIAL HOSPITALITY RESIDENTIAL

1,0 1,3 W/mK Certificate GreenGuard