


PENNY ROUNDS COTTON (G) *Porcelain*

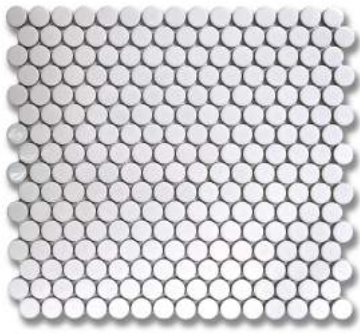

PART NUMBER
PO2507-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Water Absorption - ISO 10545-3	0.40 / 0.38~0.43
Modulus of Rupture - ISO 10545-4	53 / 50~56		

PENNY ROUNDS HEATHER (G) *Porcelain*

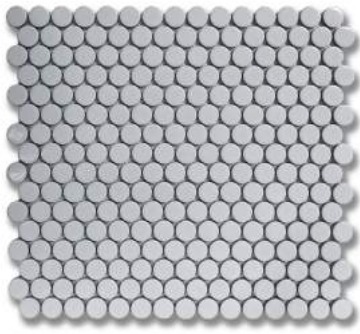

PART NUMBER
PO2511-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56

PENNY ROUNDS KODIAK (G) *Porcelain*



PART NUMBER
PO2510-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56

PENNY ROUNDS MERINGUE (G) *Porcelain*

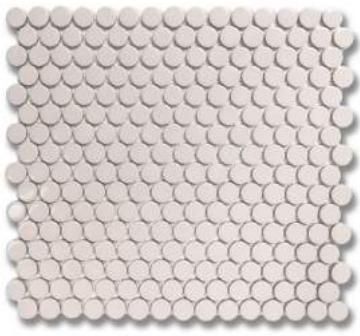

PART NUMBER
PO2509-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56

PENNY ROUNDS NEPTUNE (G) *Porcelain*

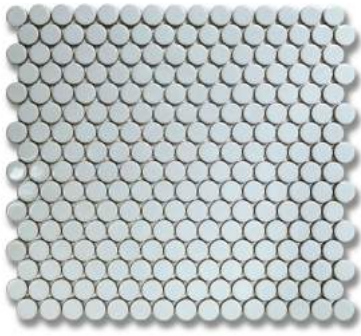

PART NUMBER
PO2512-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56

PENNY ROUNDS RAVEN (M) *Porcelain*

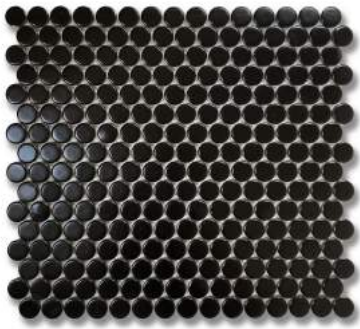

PART NUMBER
PO2508-PENYMO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA


WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56

PENNY ROUNDS TRANQUIL (G) *Porcelain*

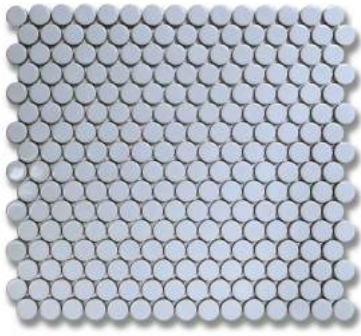

PART NUMBER
PO2513-PENYGO

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	812	Crazing Resistance - ISO 10545-11	Pass
Regularity of Rectangularity - ISO 10545-2	-0.12~+0.11	Regularity of Straightness of Sides - ISO 10545-2	-0.12~+0.11
Surface Quality - ISO 10545-2	Conformed	Resistance to Household Chemicals - ISO 10545-13	Class GA
Resistance to Swimming Pool Salts - ISO 10545-13	Class GA	Modulus of Rupture - ISO 10545-4	53 / 50~56