

AKDO®

FIKA

*Natural. Simple. Serene.
Refined aesthetics with the simplicity of nature.*

Far Beyond the Surface

FIKA

8" x 48" Planks



Fika 8" x 48" Boulder (M)

PO2605-0848M0



Fika 8" x 48" Cabin (M)

PO2608-0848M0



Fika 8" x 48" Cliff (M)

PO2607-0848M0



Fika 8" x 48" Fjord (M)


PO2606-0848M0




Fika 8" x 48" Glacier (M)

PO2604-0848M0



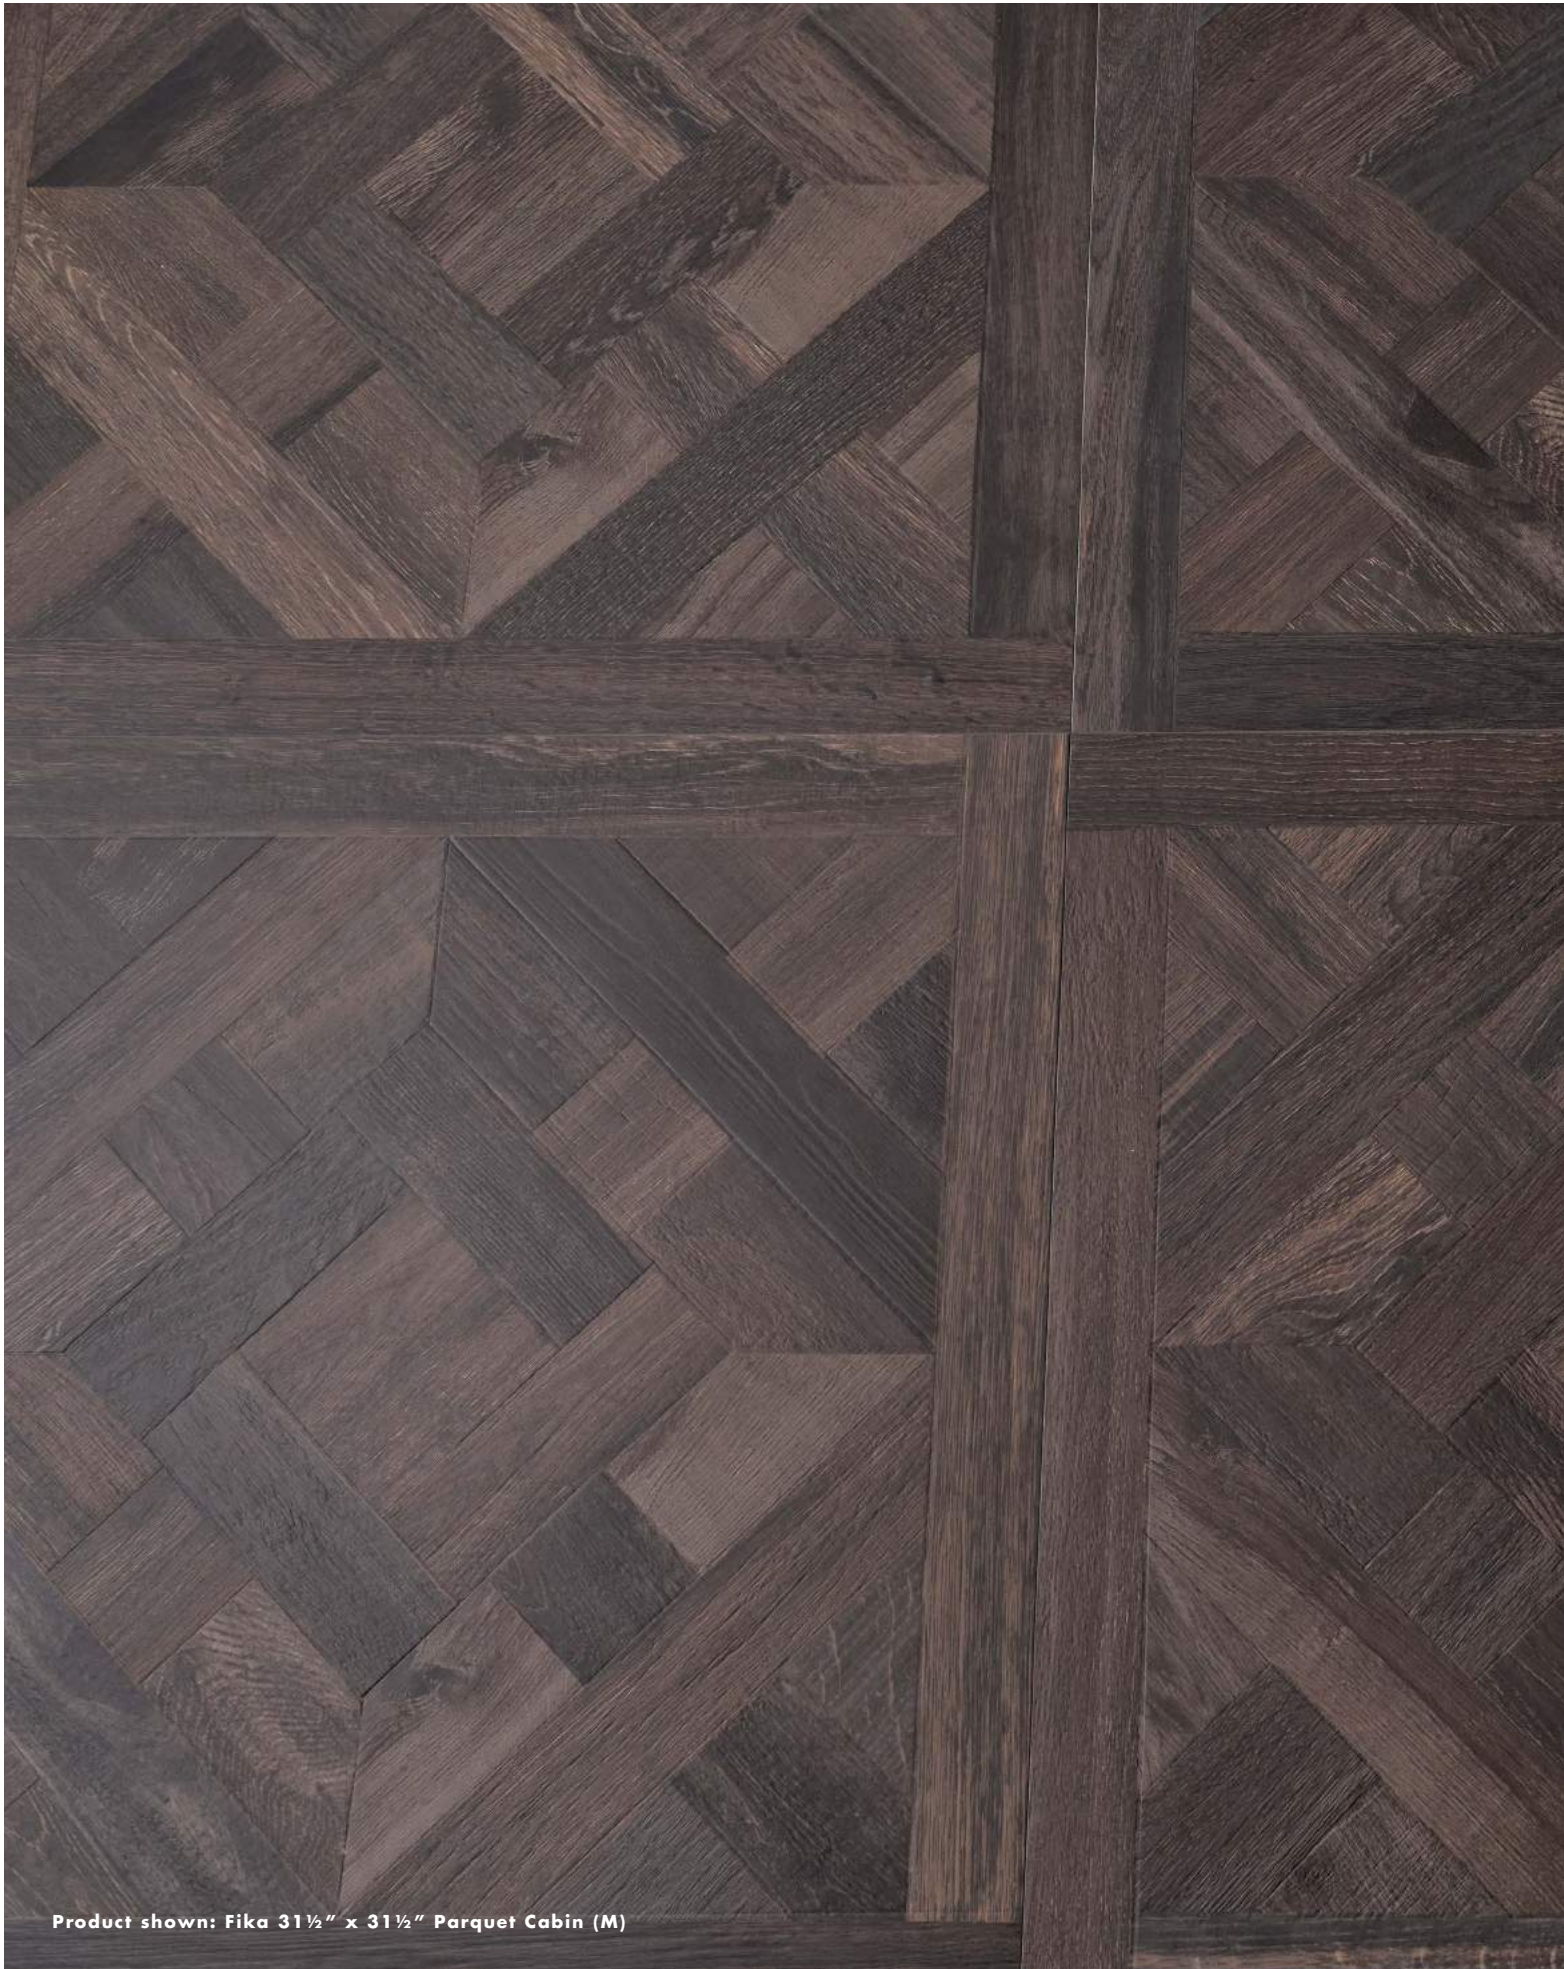

Product shown: Fika 31 1/2" x 31 1/2" Parquet Cabin (M)

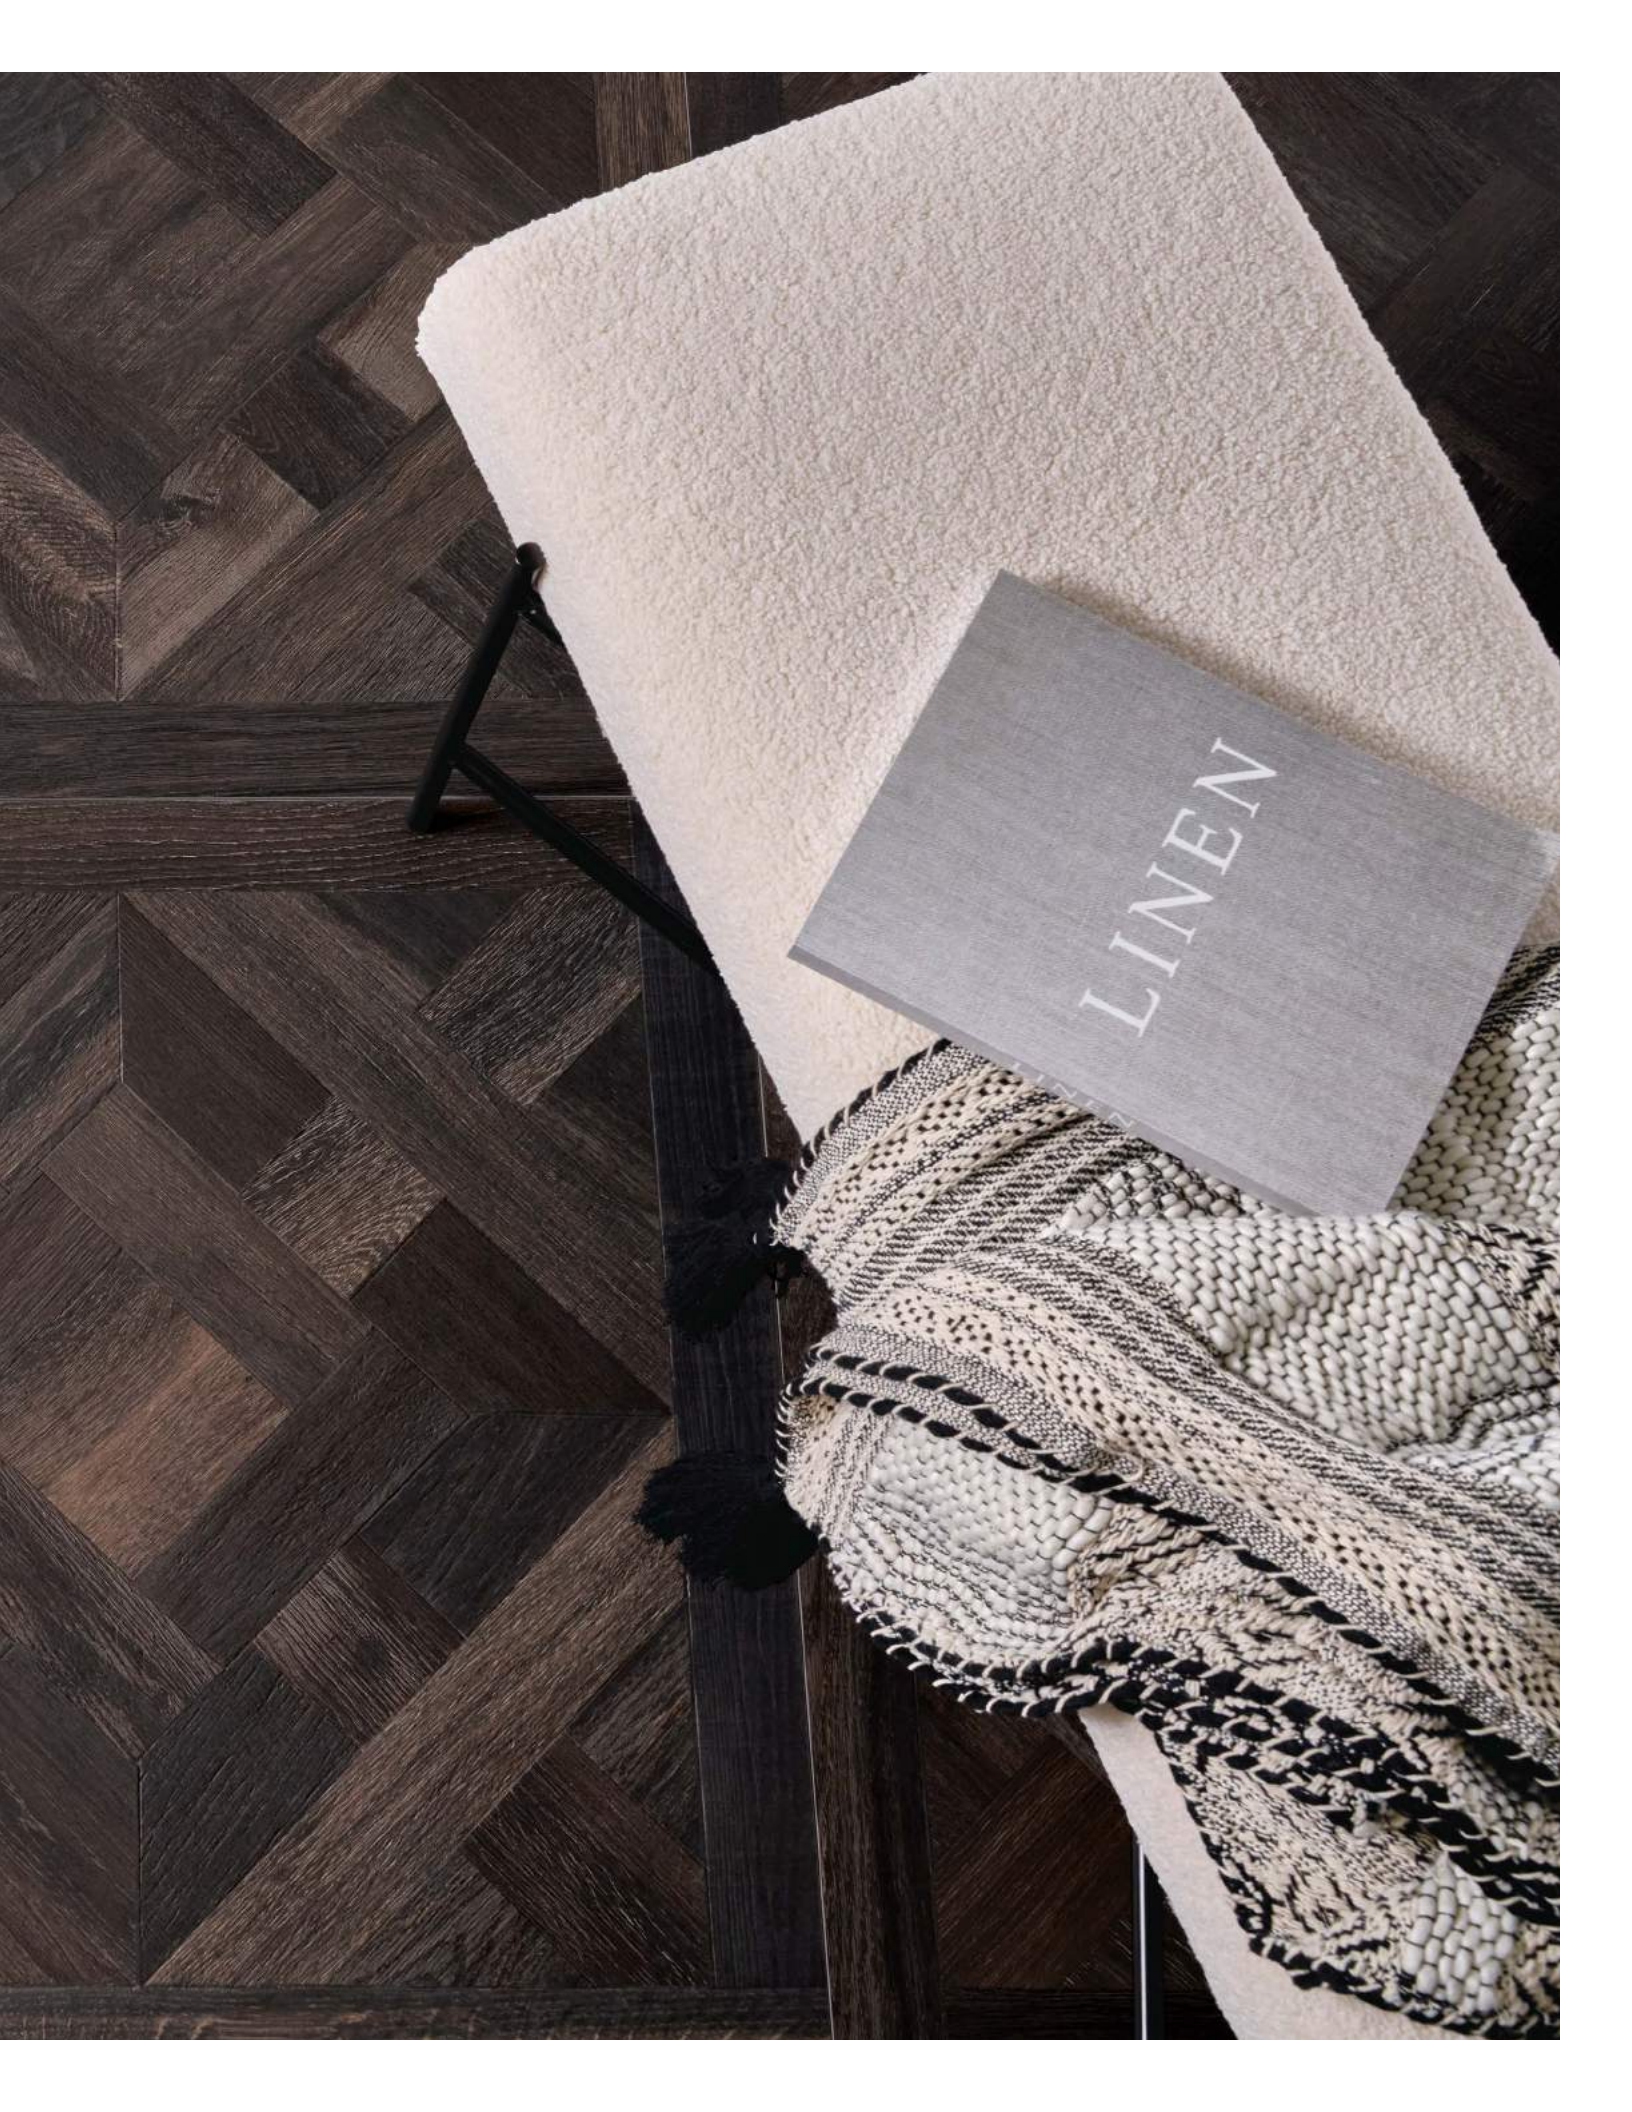

LINEN

FIKA

Parquets



Fika 31 1/2" x 31 1/2" Parquet Boulder (M)

PO2605-3232M0




Fika 31 1/2" x 31 1/2" Parquet Cabin (M)

PO2608-3232M0



Fika 31 1/2" x 31 1/2" Parquet Cliff (M)

PO2607-3232M0

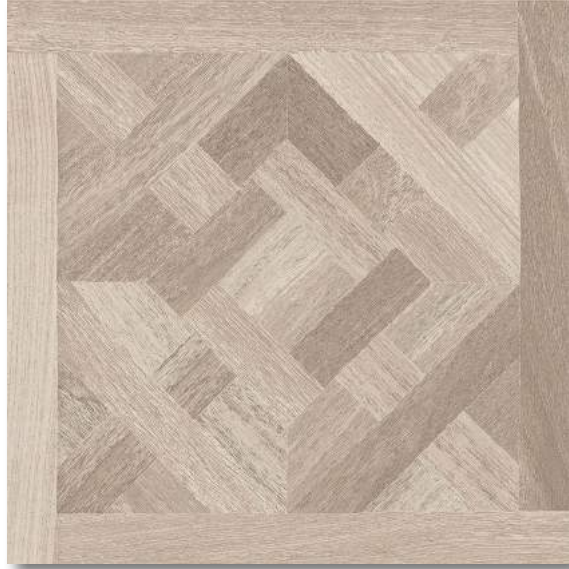

Fika 31½" x 31½" Parquet Fjord (M)

PO2606-3232M0





Fika 31½" x 31½" Parquet Glacier (M)

PO2604-3232M0



Product shown: Fika 31½" x 31½" Parquet Fjord (M)

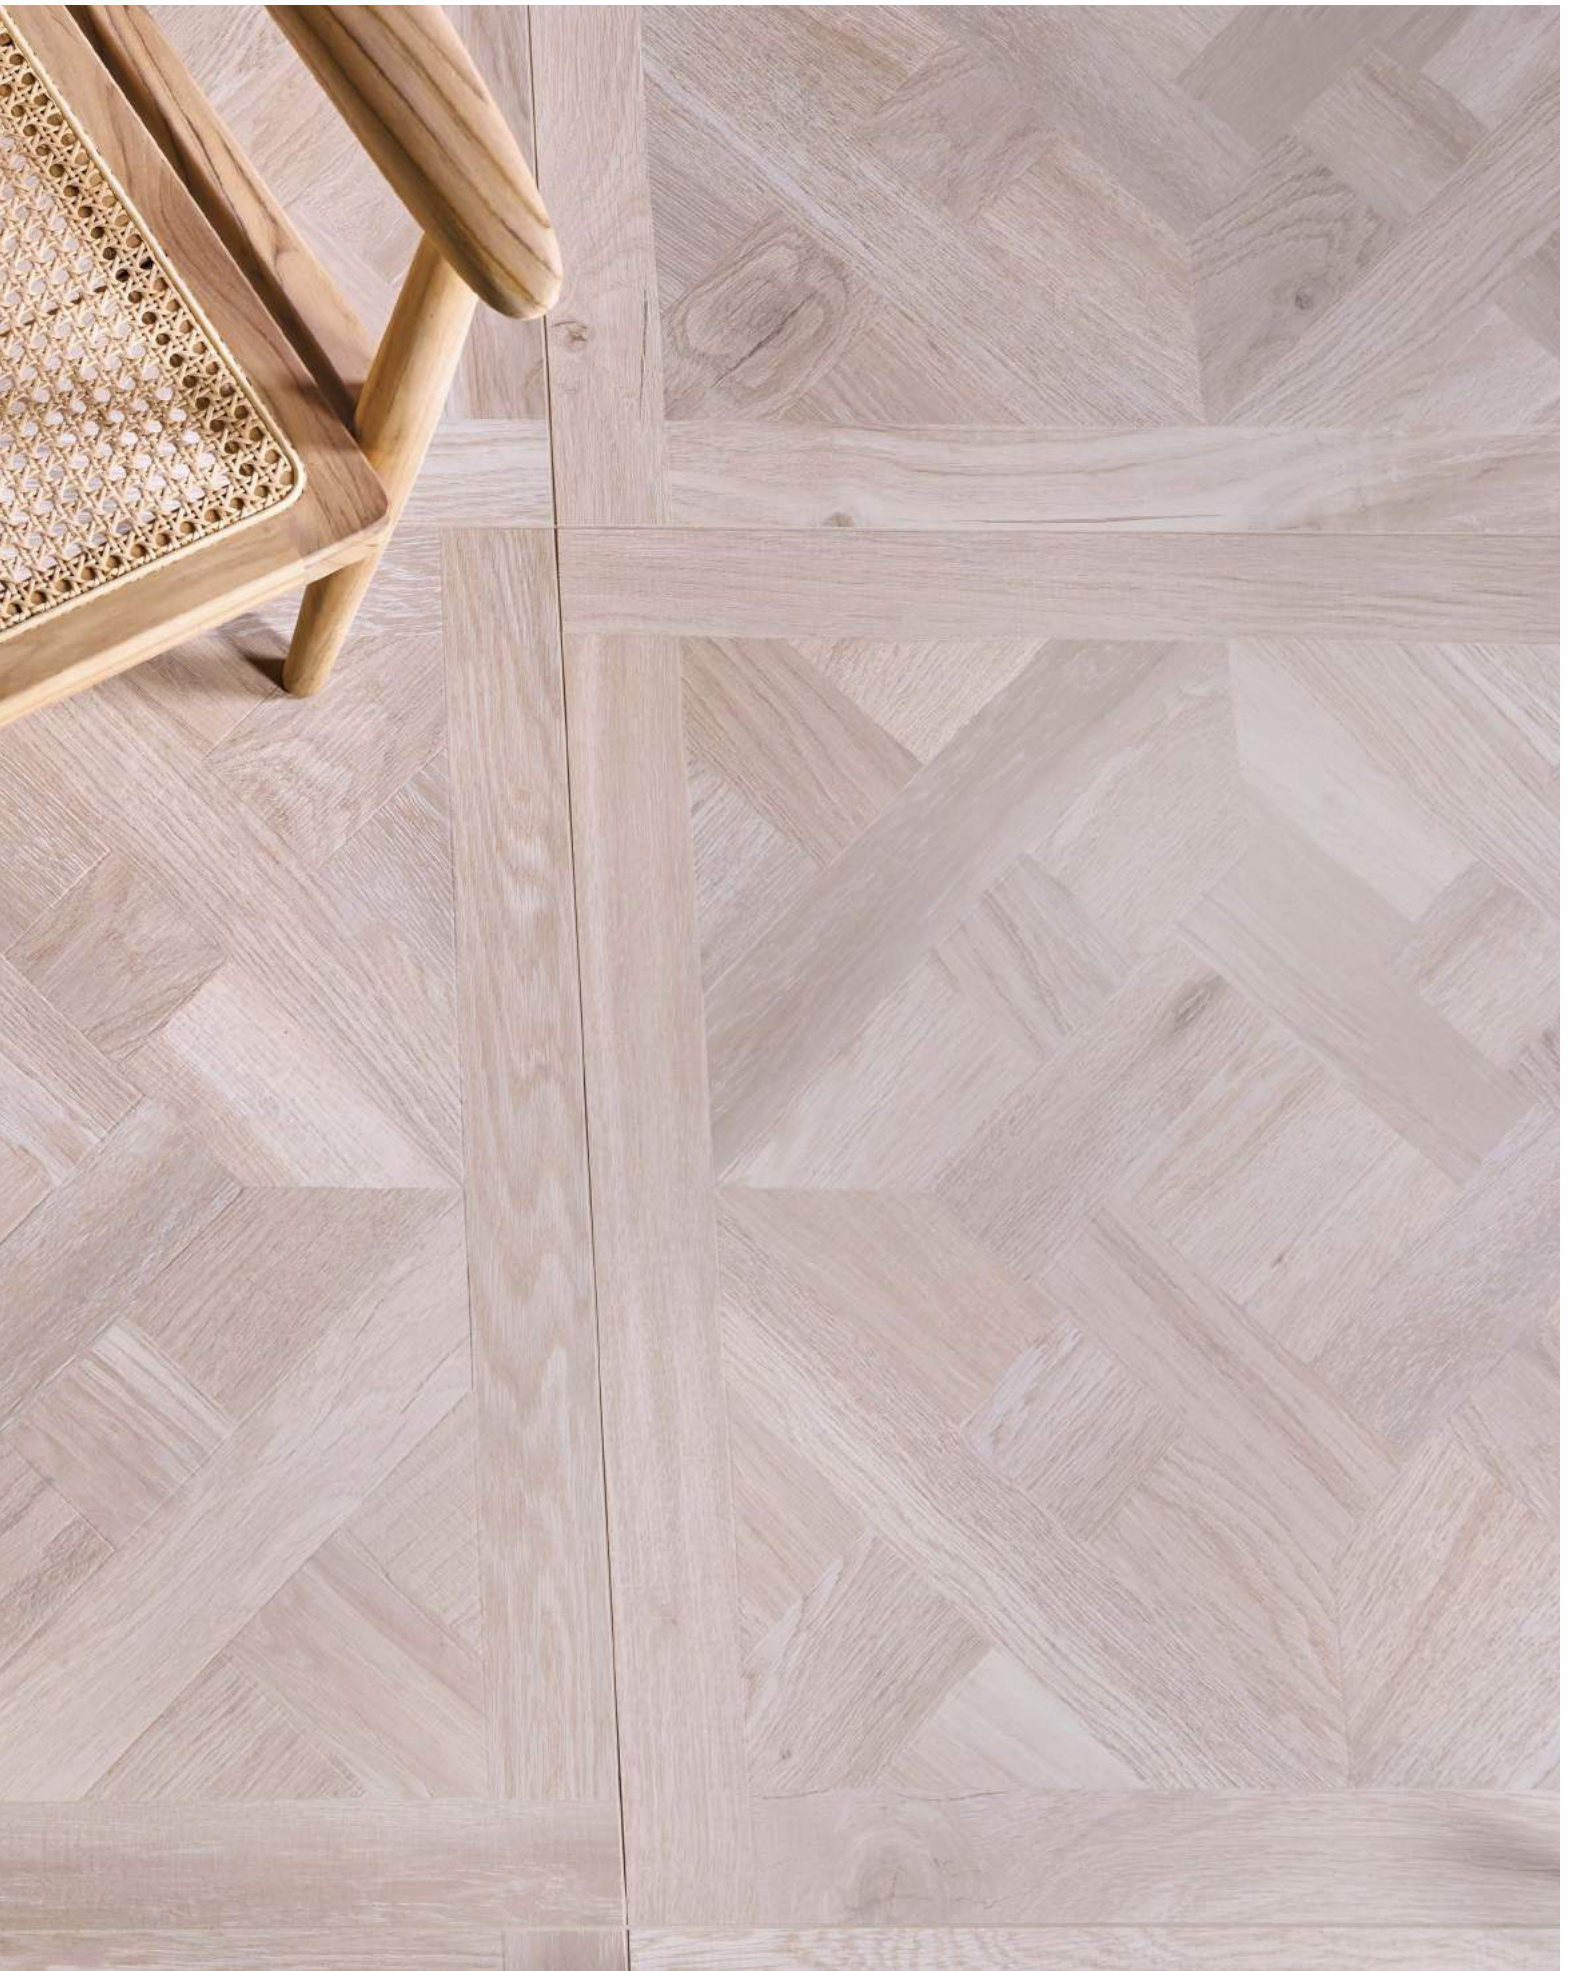

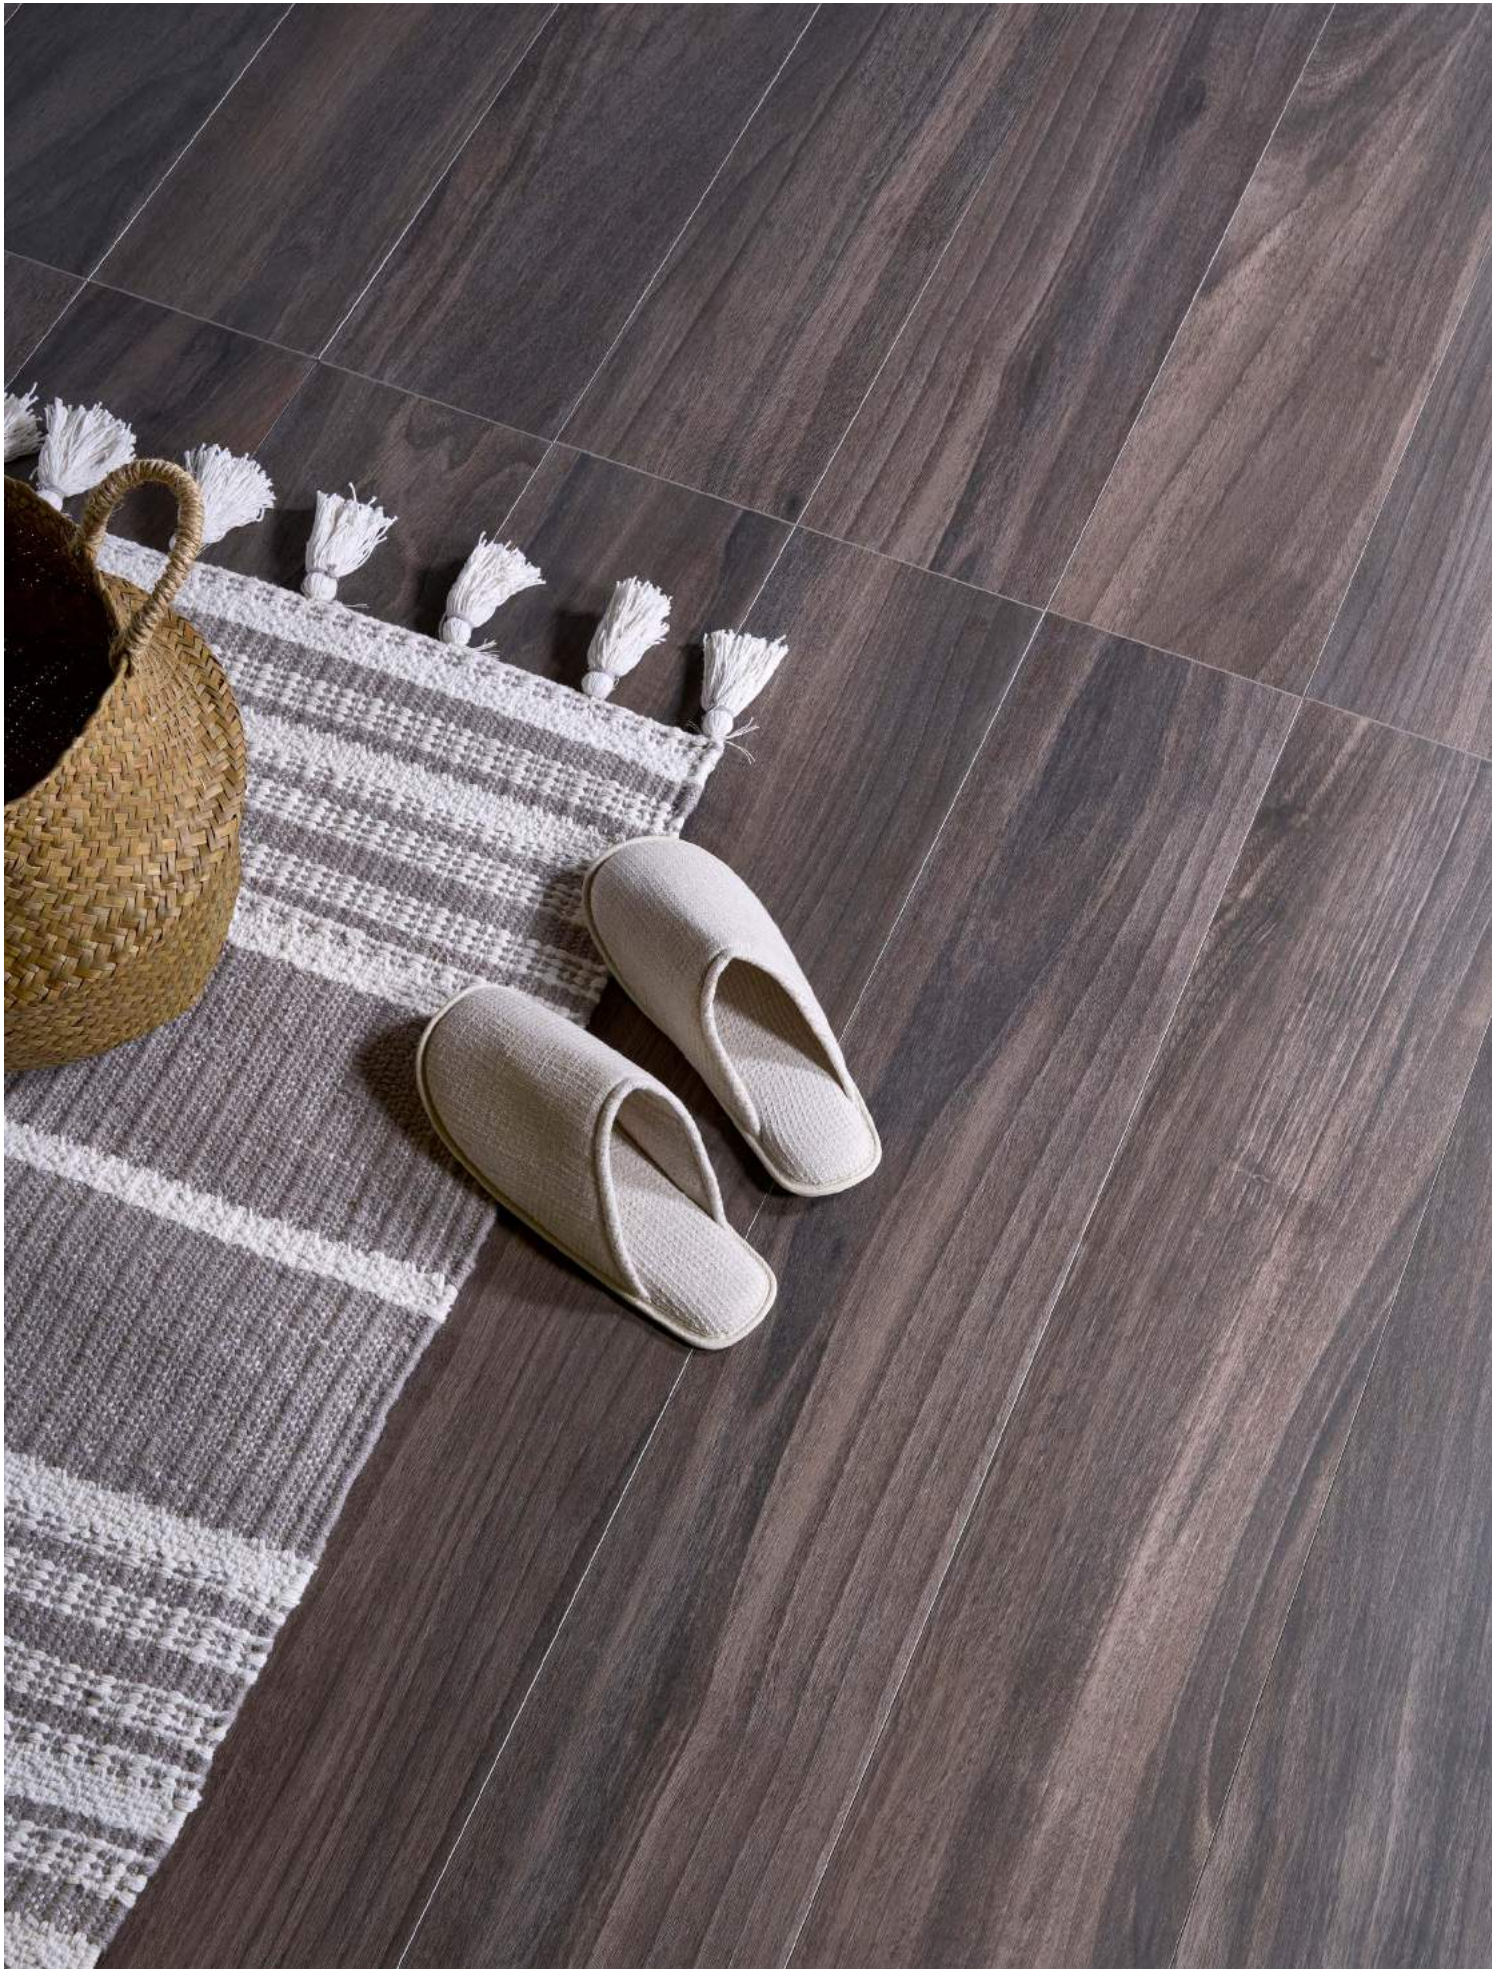

CONVERSION CHART

PROFILE	SIZE
Fika 8" x 48"	7.87" X 47.24" = 2.582 sqft
Fika Parquet	31.5" x 31.5" = 6.891 sqft

APPLICATIONS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Yes	Yes	Yes	Yes	Yes	Yes

TRAFFIC	BACKSPLASH	FIREPLACE SURROUND
Heavy Commercial	Yes	Yes

TECHNICAL DATA

FEATURES	STANDARD TEST	RESULT
Regularity of Length & Width	ISO 10545-2	±0.15%
Regularity of Thickness	ISO 10545-2	±5%
Regularity of Straightness of Sides	ISO 10545-2	±0.1%
Regularity of Rectangularity	ISO 10545-2	±0.2%
Surface Quality	ISO 10545-2	Compliant
Surface Flatness	ISO 10545-2	±0.35%
Water Absorption	ISO 10545-3	Average Value 0.08%
Bending Resistance	ISO 10545-4	Average Value 50 N/mm ²
Breaking Strength	ISO 10545-4	Average Value 3200 N
Abrasion Resistance	ISO 10545-6	Average Value 140
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Staining	ISO 10545-14	Cl. 4
Resistance to Low Concentration of Acids and Alkalis	ISO 10545-13	ULA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13	UHA
Resistance to Household Chemicals and Swimming Pool Salts	ISO 10545-13	UA
Frost Resistance	ISO 104545-12	Resistant
Barefoot Ramp Test	DIN-51097	Cl. A
DCOF	ANSI A 137.1 2012	> 0.42 wet

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

For detailed installation guidelines, visit akdo.com.

AKDO

1435 State Street
Bridgeport, CT 06605
1.800.811.2536
203.336.5199 (o)
203.336.0603 (f)

AKDO NYC

22 West 21st Street
New York, NY 10010
1.800.811.2536
212.485.0448 (o)
212.485.0449 (f)

AKDO Pacific

3445 Arden Road
Hayward, CA 94545
1.888.909.2536
510.785.2536 (o)
510.785.0895 (f)

akdo.com