

PLAZA NUEVA MIRAMAR GRAY (M) *Porcelain*



PART NUMBER
PO2573-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" x 9.06" = .377 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Light Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.


TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA MIRAMAR NAVY (M) *Porcelain*

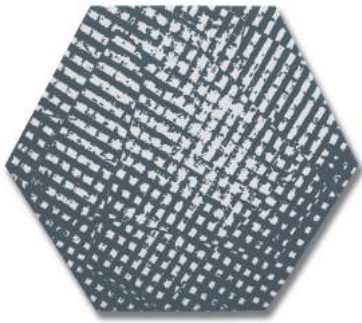

PART NUMBER
PO2574-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" x 9.06" = .377 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Light Residential	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA MIRAMAR WHITE (M) *Porcelain*



PART NUMBER
PO2572-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" x 9.06" = .377 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Light Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.


TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA RAMPA GRAY (M) *Porcelain*

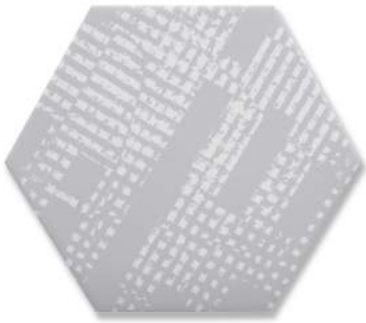

PART NUMBER
PO2581-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" X 9.06" = .377 SQFT

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Light Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.


TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA RAMPA NAVY (M) *Porcelain*

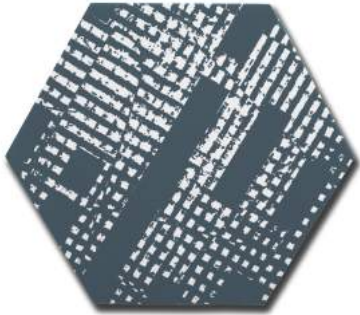

PART NUMBER
PO2582-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" x 9.06" = .377 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Light Residential	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb ² 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA RAMPA WHITE (M) *Porcelain*



PART NUMBER
PO2580-HEXA00

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.87" x 9.06" = .377 sqft

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Medium Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA VEDADO CHARCOAL (M) *Porcelain*



PART NUMBER
PO2589-070700

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.28" X 7.28" = .368 SQFT

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Light Residential	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb \leq 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA VEDADO GRAY (M) *Porcelain*



PART NUMBER
PO2588-070700

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.28" X 7.28" = .368 SQFT

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Light Commercial	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	EB ≤ 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

PLAZA NUEVA VEDADO NAVY (M) *Porcelain*



PART NUMBER
PO2590-070700

VARIATION
LOW

THICKNESS
3/8"

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE
TILE

GROUT JOINT
1/16"

AVAILABILITY
IN STOCK

DIMENSIONS
7.28" X 7.28" = .368 SQFT

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Light Residential	Yes	Yes	Yes	Yes	Yes	Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
DCOF - ANSI A.137.1	> 0.42	Frost Resistance - ISO 10545-12	Resistant
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb ² 0.5%		

LEED

EQ	MR
Low Emitting Materials	Material Ingredient Optimization
No VOCs emission	Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.